

SWING OUT WALL MOUNT CABINET

APPLICATION:

The new Hammond Wall Mount (HWM) cabinet was designed with the technical professional in mind. Our new design enables, smaller height cabinets to be installed by a single individual. The vented front door and side panels were specifically designed for high capacity servers, switches and power management devices.

FEATURES:

- Available in three (3) depths and four (4) heights.
- Includes vented 65% perforated front door (optional door types available).
- Center section features:
 - Heavy duty spring-hinge pin for easy installation and removal.
 - Side panel that includes two (2) vents and fan grill.
- Rear section features:
 - Top and side conduit knock-outs for cable entry.
 - Generous cable management lances located on the rear section as well as on mounting rails.
 - Mounting points for Outlet Strip (uses HWMPCLIP).
 - Heavy duty keyhole for wall mounting.
 - Large opening in rear for cable access.
- Front door and center section keyed the same (optional key available).

SPECIFICATIONS:

- 14-gauge welded rear section; 16-gauge center section and doors.
- EIA compliant adjustable depth mounting rails.
 - Includes one (1) pair of tapped (10-32) mounting rails.
- Recommended weight load tested for 275 lbs.
- Grounding lugs located on top and bottom of the door, center and rear sections.
- Rugged sand-textured black powder paint (reduced fingerprints and marks).

ADDITIONAL ACCESSORIES:

- Additional pair of rails can easily be added with either 10-32 taps or square holes.
- Optional tinted acrylic and solid doors available.
- Clip for mounting outlet strip (Use with 1585 Series of power strips).
- Optional lock (front door only) keyed differently for increased security.




QUICK ACCESSORIES:

Here are a few easy upgrades that can be added to your new HWM cabinet:

- Grounding Kit - GRDKIT02
- Outlet Strip Clip - HWMPCLIP
- 18" Outlet Strip - 15851H6A1
- 10-32 Screws - 1421ABK25



Center section easily removes for installation.



Tinted acrylic and solid doors also available.







Mounting points for easy mounting of outlet strip.



Generous fan knockouts/cutouts for cooling.

SWING OUT WALL MOUNT CABINET

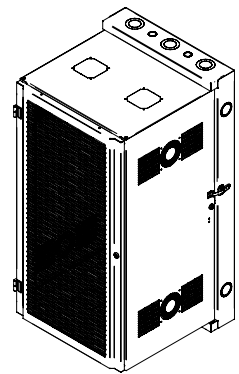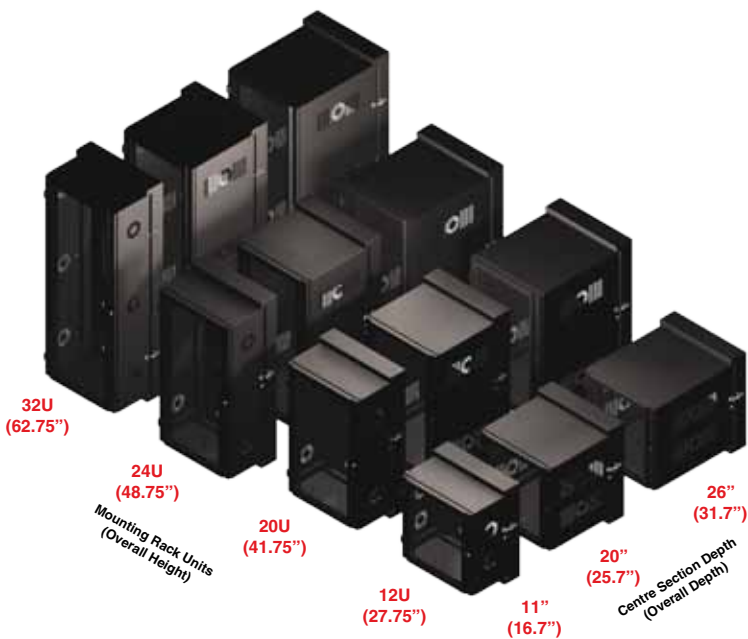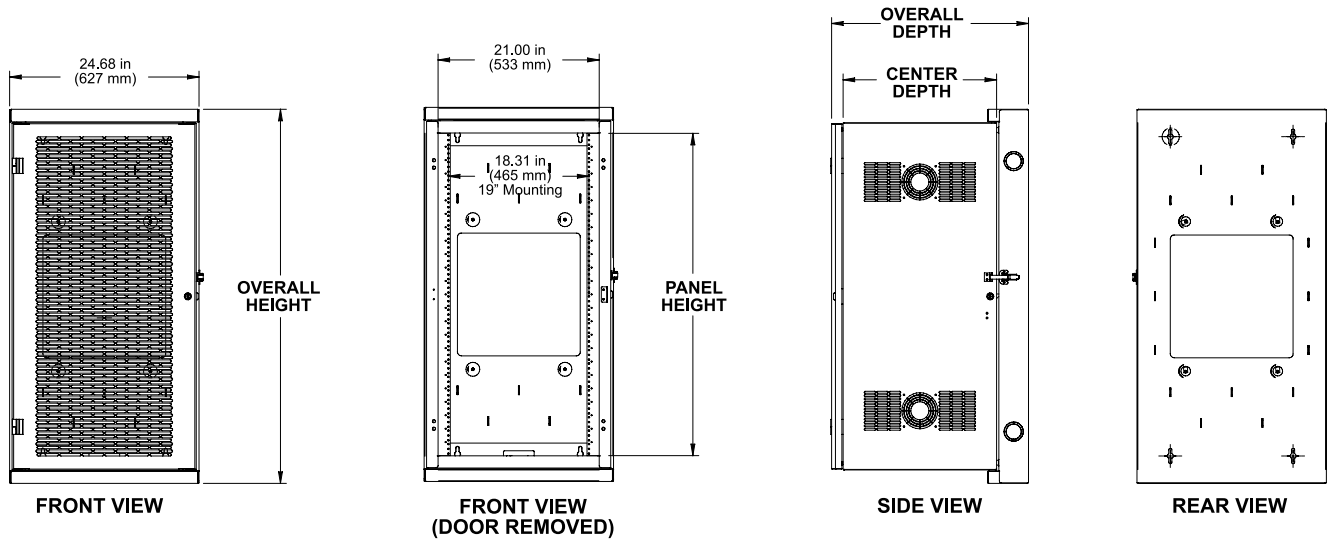

Optional Accessories:

Part #	Description
HWMSD2412UBK	12U Solid Door
HWMSD2420UBK	20U Solid Door
HWMSD2424UBK	24U Solid Door
HWMSD2432UBK	32U Solid Door
HWMPD2412UBK	12U Tinted Acrylic Door
HWMPD2420UBK	20U Tinted Acrylic Door
HWMPD2424UBK	24U Tinted Acrylic Door
HWMPD2432UBK	32U Tinted Acrylic Door
HWMTR12U	12U Tapped 10-32 Rail (Pair)
HWMTR20U	20U Tapped 10-32 Rail (Pair)
HWMTR24U	24U Tapped 10-32 Rail (Pair)
HWMTR32U	32U Tapped 10-32 Rail (Pair)
HWMSR12U	12U Square Hole Rail (Pair)
HWMSR20U	20U Square Hole Rail (Pair)
HWMSR24U	24U Square Hole Rail (Pair)
HWMSR32U	32U Square Hole Rail (Pair)
HWMPCLIP	Power Bar Clip
HWMSLOCK	Front door lock (Keyed differently)
GRDKIT02	Ground Kit
DNFK1AC120	Single (1) Fan kit with grills & cord
DNFK2AC120	Dual (2) Fan kit with grills & cord

Part #	Center Depth (Inches)	Panel Height (Inches)	Units	Overall Dim. Height (Inches)	Overall Dim. Depth (Inches)
HWM2412U11BK	11	21	12	27.75	16.7
HWM2420U11BK	11	35	20	41.75	16.7
HWM2424U11BK	11	42	24	48.75	16.7
HWM2432U11BK	11	56	32	62.75	16.7
HWM2412U20BK	20	21	12	27.75	25.7
HWM2420U20BK	20	35	20	41.75	25.7
HWM2424U20BK	20	42	24	48.75	25.7
HWM2432U20BK	20	56	32	62.75	25.7
HWM2412U26BK	26	21	12	27.75	31.7
HWM2420U26BK	26	35	20	41.75	31.7
HWM2424U26BK	26	42	24	48.75	31.7
HWM2432U26BK	26	56	32	62.75	31.7