

24V / Small Control Open Style, Chassis Mount - 25 VA to 50 VA *PHC*




Serie

120V, 208V, 347V or 600V Primary

Features



- Used as a small 24 volt transformer for relay, pilot lights or low voltage, low power control use.
- 60 Hz. operation.
- Chassis mount.
- With 10" leads.
- CSA certified (209651)
- UL listed (File #E207860)

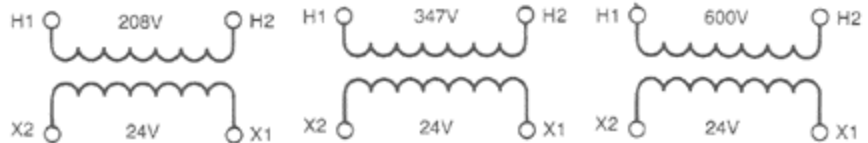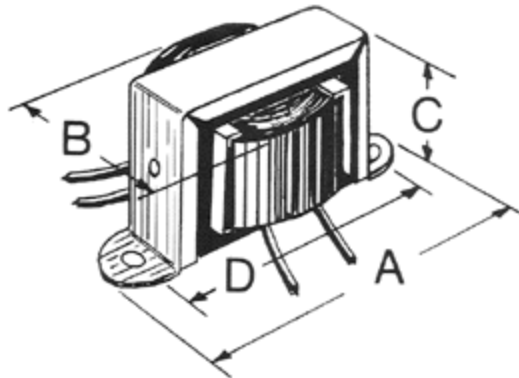

ASK ABOUT
Custom
Transformers
& Chokes



Part No.	Primary Voltage	Secondary			Overall Dimensions			Mounting Hole Centers (D)
		Secondary Voltage	Secondary Current (Amps)	VA	Height (C)	Width (A)	Depth (B)	
PHC50PG A	24	24 VCT	2.08	50	2.63	4.00	2.25	3.56
PHC25JG A	120	24	1.04	25	2.31	3.69	2.13	3.13
PHC50JG A	120	24	2.08	50	2.63	4.00	2.50	3.56
PHC25LG A	208	24	1.04	25	2.31	3.69	2.13	3.13
PHC50LG A	208	24	2.08	50	2.63	4.00	2.50	3.56
PHC25KG A	347	24	1.04	25	2.31	3.69	2.13	3.13
PHC50KG A	347	24	2.08	50	2.63	4.00	2.50	3.56

Part No.	Primary Voltage	Secondary Voltage	Secondary Current (Amps)	VA	Overall Dimensions			Mounting Hole Centers (D)
					Height (C)	Width (A)	Depth (B)	
PHC25FG A	480	24	1.04	25	2.31	3.69	2.13	3.13
PHC50FG A	480	24	2.08	50	2.63	4.00	2.50	3.56
PHC25AG A	600	24	1.04	25	2.31	3.69	2.13	3.13
PHC50AG A	600	24	2.08	50	2.63	4.00	2.50	3.56

Tags: power transformers, 24 volt, relay, pilot light, low voltage, low power

Datos sujetos a cambios sin previo aviso.

© 2026. Hammond Manufacturing Ltd. Todos los derechos reservados.