

Series 2000 Modular Console System - NEMA 12, 4, 4X

Base Units

Operator Interface Enclosure



Single Access



Dual Access



Application

- Flexible design provides panel mount or rack mount capabilities for a variety of applications.
- Generally used in combination with other modular console components (ie. another base, terminal, desk and/or turret).
- Available in either single or dual access format.
- Smooth lines and clean edges provide an attractive, contemporary appearance.

Standards

RAL 7032 Beige

- UL 508 Type 12
- CSA Type 12
- EIA RS-310-D
- Complies with
 - NEMA Type 12
 - IEC 60529, IP54

ANSI 61 Gray

- UL 508 Type 3R, 4, 12
- CSA Type 3R, 4, 12, 13
- EIA RS-310-D
- Complies with
 - NEMA Type 3R, 4, 12
 - IEC 60529, IP66

Stainless Steel (Type 304)

- UL 508 Type 3R, 4, 4X, 12
- CSA Type 3R, 4, 4X, 12
- EIA RS-310-D
- Complies with
 - NEMA Type 3R, 4, 4X, 12
 - IEC 60529, IP66

Construction

- Formed 14 gauge steel bodies with 14 gauge steel door.
- Also offered with formed 14 gauge 304 stainless steel bodies with 14 gauge 304 stainless steel door.
- Smooth, continuously welded seams.
- Body stiffeners are provided where required for increased strength and rigidity.
- Offered in 4 widths 24", 36", 48" and 60".
- Single access version has solid sides and back, solid door on front, open top, and closed bottom with removable access panel.
- Dual access version is same as above except has solid door on both front and back.
- 24" and 36" widths have single door on the front (and back for dual access) whereas 48" and 60" widths have two outside hinged doors on the front (and back for dual access.)
- Doors can be hinged from either side on 24" and 36" units.
- Door profiles provide increased strength and are pre-punched to provide mounting options.
- Formed lip on enclosure excludes flowing liquids and contaminants.
- Slotted quarter turn oil-tight latches secure the door, with optional tamper resistant and locking latches available.
- Stainless steel models utilize stainless steel hardware.
- Oil resistant gaskets are permanently secured.

- Features several internal stud locations for mounting of various accessories.
- A bonding screw is provided on the door and a grounding stud is provided in the enclosure.

Finish

- Available in RAL 7032 beige powder coating, ANSI 61 gray powder coating and natural stainless steel with a smooth, brushed finish.
- Base Covers are available in the same finishes.

Accessories

- Air conditioners...see page 389
- Base cover...see page 266
- Base panel...see page 267
- Base window door...see page 267
- Blowers...see page 406
- Filter fans...see page 408-414
- Fan trays...see page 416
- Heaters...see page 418-420
- Series 2000 Modular Console Accessories...see page 264-271
- Rack Mount Accessories ...see page 272-274

Technical references and DXF downloads available at www.hammmfg.com






All dimensions in inches unless specified otherwise

Modular Console System






Series 2000 Modular Console System - NEMA 12, 4, 4X Base Units

Operator Interface Enclosure

Single Access

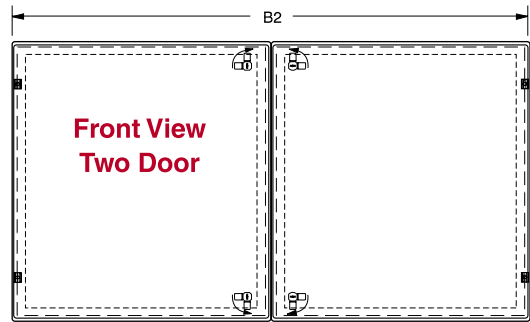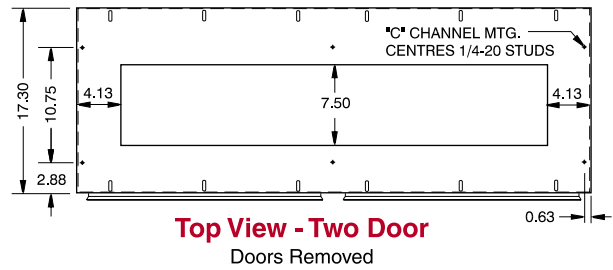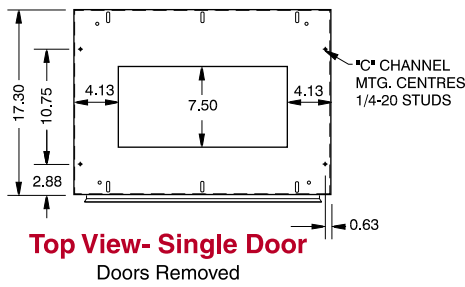

Dual Access

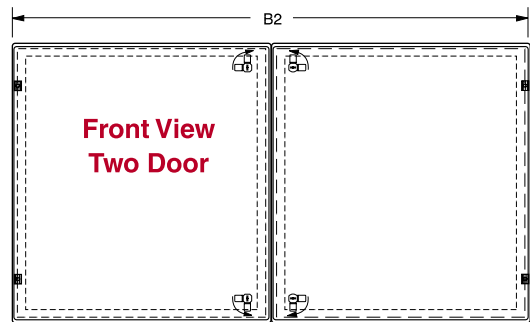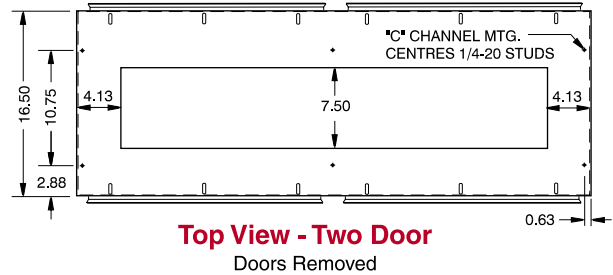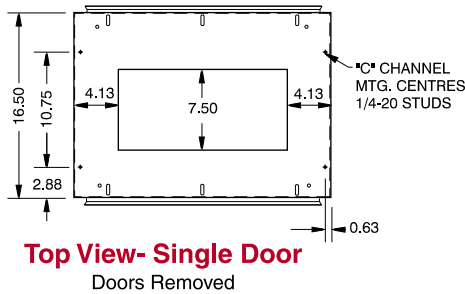

Modular Console System

Single Access

RAL 7032 Beige Part No.	ANSI 61 Gray Part No.	Stainless Steel Part No.	B1	B2
2CRB262418	2CPB262418	2CSB262418	24	n/a
2CRB263618	2CPB263618	2CSB263618	36	n/a
2CRB264818	2CPB264818	2CSB264818	n/a	48
2CRB266018	2CPB266018	2CSB266018	n/a	60

Dual Access

RAL 7032 Beige Part No.	ANSI 61 Gray Part No.	Stainless Steel Part No.	B1	B2
2CRBX262418	2CPBX262418	2CSBX262418	24	n/a
2CRBX263618	2CPBX263618	2CSBX263618	36	n/a
2CRBX264818	2CPBX264818	2CSBX264818	n/a	48
2CRBX266018	2CPBX266018	2CSBX266018	n/a	60

Technical references and DXF downloads available at www.hammfg.com

All dimensions in inches unless specified otherwise

Quality Enclosures. Service Excellence.