



Quality Products. Service Excellence.

Tube Guitar Amplifier - Chokes 194 Series


REPLACEMENT & UPGRADES

Features



- Designed for drop in replacement of original units.
- Physically, parts were designed to look similar to original factory units (where possible).
- Inductances measured at rated D.C. current.
- Material used & design specs. were kept as close as possible to the original part to preserve the stock "tone".
- Units are vacuum impregnated with polyurethane varnish for quiet and long life operation.
- "Click" on thumbnail photos below for a full size photo of each part.

Gallery

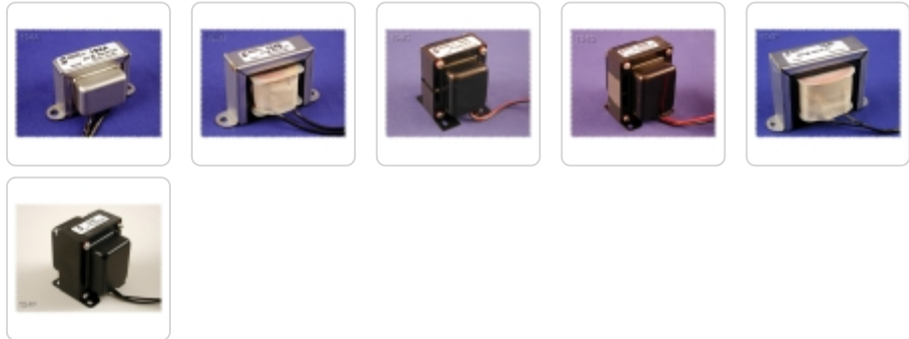

Fender (Power Supply Chokes)

Hammond Part No.	Inductance +/- 15%	D.C. Current	Amplifier Manufacturer	Amplifier Model Names	Equivalent To Manufacturer Part No
194A	4 H	50 ma.	Fender	Deluxe, Deluxe Reverb, Vibrolux, Vibrolux Reverb 1964 Blackface 6G15 Reverb	125C3A & 022707
194B	4 H	90 ma.	Fender	Bandmaster, Dual Showman, Pro Reverb, Twin Super	125C1A & 022699

Marshall (Power Supply Chokes)

Hammond Part No.	Inductance +/- 15%	D.C. Current	Amplifier Manufacturer	Amplifier Model Names	Equivalent To Manufacturer Part No
194G	3H	250 ma.	Marshall	Plexi	-
194F	5 H	120 ma.	Marshall	Later Mark II and 800 (50 & 100 Watt) not Plexis	-
194C	40 H	50 ma.	Marshall	Pre-amp Plexi/JCM800	-

VOX (Power Supply Chokes)

Hammond Part No.	Inductance +/- 15%	D.C. Current	Amplifier Manufacturer	Amplifier Model Names	Similar To Manufacturer Part No
194D	5 H	150 ma.	VOX	AC30 reissue	-
194E	30 H	100 ma.	VOX	AC30 reissue	-

YORKVILLE SOUND / TRAYNOR (Power Supply Chokes)

Hammond Part No.	Inductance +/- 15%	D.C. Current	Amplifier Manufacturer	Amplifier Model Names	Similar To Manufacturer Part No
------------------	--------------------	--------------	------------------------	-----------------------	---------------------------------

Hammond Part No.	Inductance +/- 15%	Current	Manufacturer	Model Names	Manufacturer Part No
159Q	7H	150 ma.	Yorkville	Bassmaster YBA-1	A-1311

* DISCLAIMER: Hammond Mfg. is not affiliated with Fender Musical Instruments Corp., Marshall Amplification, Yorkville/Traynor, AMPEG or VOX Amplification companies. Amplifier model names are trademarks of the Amplifier companies and are just listed here for reference purpose only.

Data subject to change without notice

© 2018. Hammond Manufacturing Ltd. All rights reserved.