

# Heating Products



## Control Panel Heater


- When larger heating capacities or internal forced air circulation is required and space is limited.
- Compact design to prevent condensation or maintain minimum temperature in enclosures.
- Fan is included.
- Thermostats available

Part No.	Watts	Operating Current (Amps)	Volts	Temperature Maximum with Fan	Ship Wt. lbs
SHV031029	100 W	0.89	AC 120	250°F/120°C	1
SHV031039	150 W	1.30	AC 120	320°F/160°C	1
SHV031139	200 W	1.79	AC 120	250°F/120°C	2
SHV031149	300 W	2.62	AC 120	320°F/160°C	2
SHV031159	400 W	3.45	AC 120	360°F/180°C	2





<b>Operating Voltage:</b>	AC 110 -120 V 50/60 Hz
<b>Air Flow:</b>	20 CFM (100W, 150W heaters), 63 CFM (200W, 300W, 400W heaters)
<b>Axial Fan:</b>	Ball bearing
<b>Durability:</b>	50,000 hrs. at 77°F ambient temperature
<b>Heating Element:</b>	Cartridge heater
<b>Heating Body:</b>	Die cast aluminum
<b>Connection:</b>	5 pole terminal for 14 AWG (maximum)
<b>G/L1/N1:</b>	Heater
<b>L2/N2:</b>	Fan
<b>Mounting:</b>	Easily installed by clip mounting on 35 mm DIN rails (included)
<b>Protection class:</b>	1 (tested for grounding at 1500 V)
<b>Protection:</b>	IP20
<b>Approval:</b>	UL Recognized Component, cUL Recognized Component, CE

Climate Control



**100 W, 150 W Heaters**

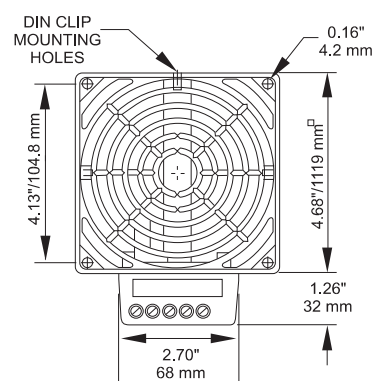

**200 W, 300 W, 400 W Heaters**

