


# General Accessories

## Window Kits

 General Accessories  
Window Kits


### Steel and Stainless Steel Window Kits

- Designed to maintain environmental protection level of Type 4, 4X (for stainless steel) as noted
- Window is 0.25" thick, UV resistant Polycarbonate.
- Frame is heavy gauge steel, or 304 stainless steel with integral weld studs and compression clips.
- Oil resistant neoprene gasket ensures a watertight seal.
- Finished in gray or natural brushed stainless steel.

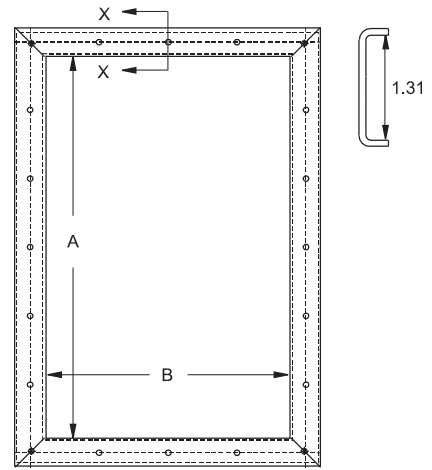

Part No.	Material	Window Dimensions		Recommended Cut-Out Size	
		A	B		
1481WN40503 <sup>1</sup>	Steel	5	3.0	6.69	4.69
1481WN40905 <sup>1</sup>	Steel	9	5.5	10.69	7.19
1481WN41303 <sup>1</sup>	Steel	13	3.0	14.69	4.69
1481WN41308 <sup>1</sup>	Steel	13	8.0	14.69	9.69
1481WN41705 <sup>1</sup>	Steel	17	5.5	18.69	7.19
1481WN41711 <sup>1</sup>	Steel	17	11.0	18.69	12.69
1481WN42315 <sup>1</sup>	Steel	23	15.0	24.69	16.69
1481WN42919 <sup>1</sup>	Steel	29	19.0	30.69	20.69
1481WN43523 <sup>1</sup>	Steel	35	23.0	36.69	24.69
1481WN4SS0503 <sup>2</sup>	Stainless Steel	5	3.0	6.69	4.69
1481WN4SS0905 <sup>2</sup>	Stainless Steel	9	5.5	10.69	7.19
1481WN4SS1308 <sup>2</sup>	Stainless Steel	13	8.0	14.69	9.69
1481WN4SS1711 <sup>2</sup>	Stainless Steel	17	11.0	18.69	12.69
1481WN4SS2315 <sup>2</sup>	Stainless Steel	23	15.0	24.69	16.69
1481WN4SS2919 <sup>2</sup>	Stainless Steel	29	19.0	30.69	20.69

<sup>1</sup> UL/ CSA Type 12 and Type 4

<sup>2</sup> UL/ CSA Type 12, Type 4 and Type 4x


### Frameless Window Kits

- Designed for indoor use on Type 12 and 13 enclosures.
- Scratch resistant polycarbonate window is 0.25 inches thick.
- Double sided tape is on the window for easy installation.
- Mounting hardware and template are included.



Part No.	Window Dimensions		Maximum Cut-Out Size	
	A	B		
1481WFL52	5.50	3.00	4.50	2.00
1481WFL133	13.88	3.88	12.88	2.88
1481WFL96	9.62	7.19	8.62	6.19


 Technical references and CAD downloads available at [www.hammondmfg.com](http://www.hammondmfg.com)

All dimensions in inches unless specified otherwise