

Plate & Filament - 22 VA to 248 VA 260 Serie

Universal Primary & 50/60 Hz. Operation

Features




- Universal primary with taps for 100, 120, 220 or 240 VAC, 50/60 Hz. (Except the 260A6 which is 117V, 50/60 Hz only)
- Designed for preamps, low power amps, general replacement, test equipment, etc.
- Economical, open frame, chassis mount - two hole (.187 dia. = G) channel bracket (figure #1) or four hole mounting (figure #2).
- Units include a Faraday shield between the primary and secondary windings. Our electrostatic shield reduces the capacitive coupling from the primary - greatly attenuating higher frequency current coupling to the secondaries.
- Minimum 5" long leads.
- For more selection check out our **300 Series** of universal plate & filament transformers.



NOTES

1. These units are designed to run with BOTH primary windings energized for maximum efficiency (see wiring table below).
2. The Faraday shield lead - the gray wire - marked SH (shield) above, should remain grounded to the mounting bracket & in turn to the chassis.

Galería

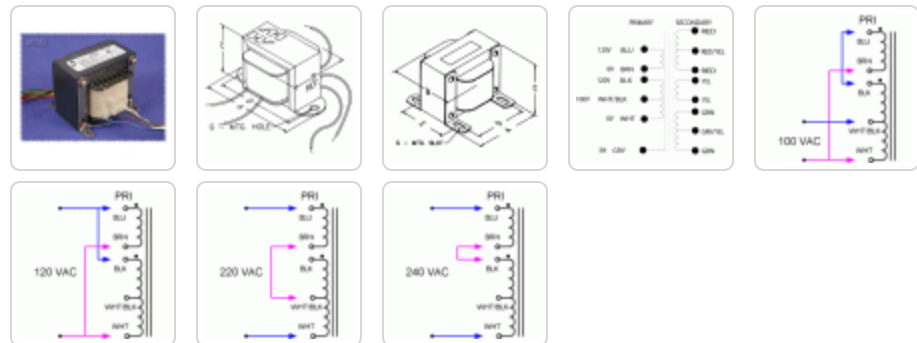

Part No.	VA	A.C. High Voltage	A.C. Filament	A.C. Filament	Figure # or PDF	Dimensions					
		Secondary y #1 RMS	Secondary y #2 RMS	Secondary y #3 RMS		A	B	C	D	E	G
260A	22	400V C.T. @ 46ma.	6.3V C.T. @ 1A	-	1	3.25	2.00	2.00	2.81	-	0.19
260A6	57	740V C.T. @ 60ma.	6.3V C.T. @ 2A	-	See PDF	2.5	2.155	3	-	-	-
260C	65	500V C.T. @ 85ma..	5V @ 2A	6.3V C.T. @ 2A	1	4.03	2.65	2.62	3.56	-	0.19

Part No.	VA	A.C. High	A.C.	A.C.	Figure # or PDF	Dimensions							
		Voltage Secondary y #1 RMS	Filament Secondary y #2 RMS	Filament Secondary y #3 RMS		A	B	C	D	E	G		
260E	80	450V C.T. @ 115ma.	5V @ 2A	6.3V C.T. @ 3A	See PDF	3.00	3.06	2.53	2.50	2.40	0.21	x	0.38
260G	175	550V C.T. @ 230ma.	5V @ 3A	6.3V C.T. @ 5A	See PDF	3.75	3.50	3.13	3.25	3.25	0.20	x	0.38
260J	152	650V C.T. @ 173ma.	5V @ 2A	6.3V C.T. @ 4A	2	3.75	3.13	3.13	3.12	2.75	0.22	x	0.56
260K	197	650V C.T. @ 230ma.	5V @ 3A	6.3V C.T. @ 5A	2	4.50	3.25	3.75	3.75	3.00	0.22	x	0.56
260M	248	700V C.T. @ 288ma.	5V @ 3A	6.3V C.T. @ 5A	2	4.50	3.25	3.75	3.75	3.00	0.22	x	0.56

Tags: **classic transformer, plate, filament, universal primary, faraday, electrostatic, preamp**

Datos sujetos a cambios sin previo aviso.

© 2026. Hammond Manufacturing Ltd. Todos los derechos reservados.