

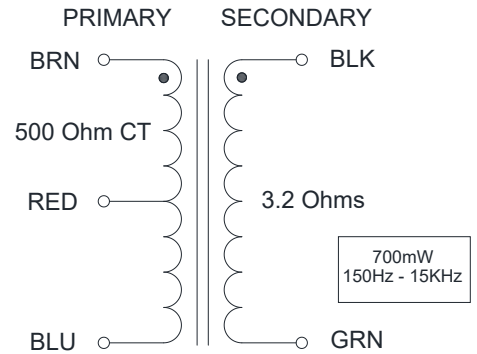

146 Series
Chassis Mount Audio Transformers

146H

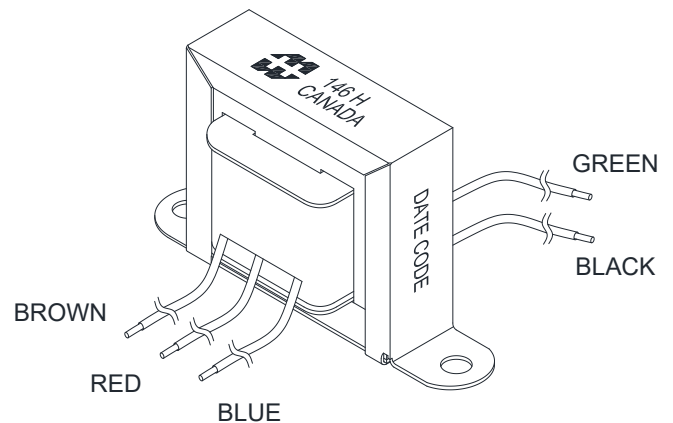
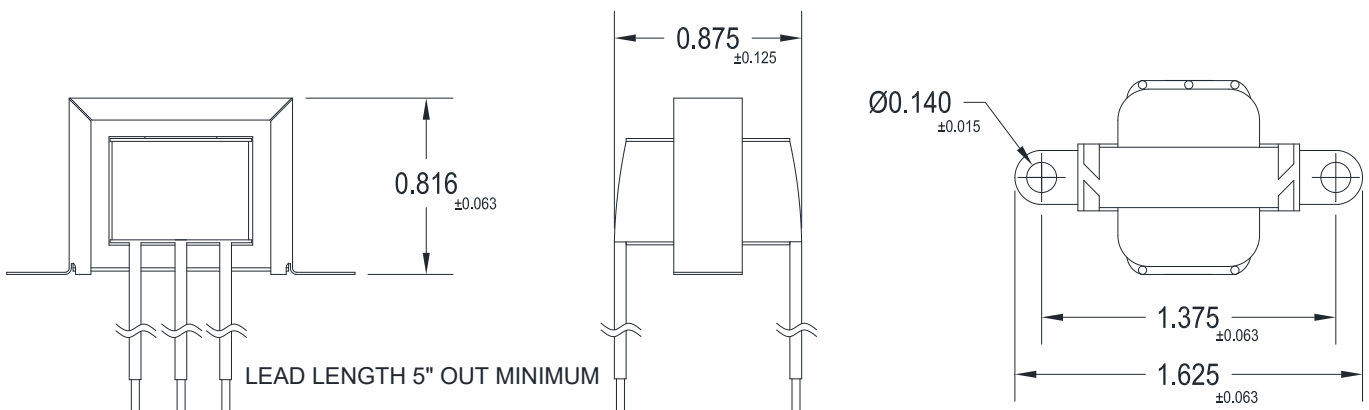
Features:

- Small, economical, open, two-hole horizontal bracket mount.
- Insulated and color-coded flexible leads 5" long minimum
- Frequency response 150 Hz. to 15 KHz. (+/- 1 dB, reference 1 KHz.)
- Weight: 1.3 oz.

Note: When operating at impedances below nominal, power capability and the frequency spectrum are proportionately lower, conversely, at higher impedances power capability and frequency spectrum will be proportionately higher.

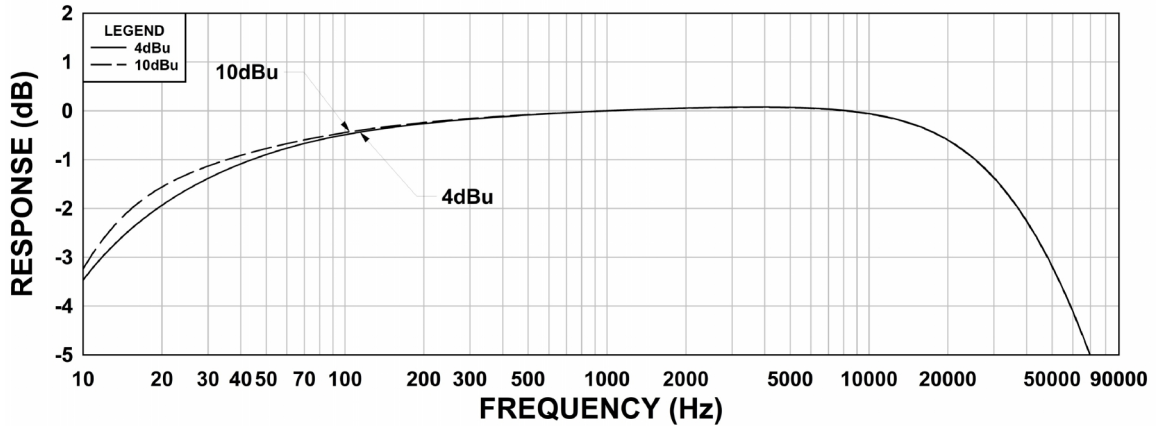
SCHEMATIC

ELECTRICAL SPECIFICATIONS

Characteristics	Typical
Input Impedance	500 Ohms CT
Output Impedance	3.2 Ohms
Output Power	700 mW
DCR Blue-Brown	26.0 Ohms
DCR Black-Green	0.300 Ohms
Dielectric Strength	500V RMS
Temperature Range	-40 to 105 degC
Inductance Impedance @ 150 Hz, 5.0 V OC	
Blue-Brown	2.489 H 3.0K Ohms
Leakage Inductance @ 150 Hz, 5.0 V SC	
Blue-Brown	4.50mH


DIMENSIONAL DETAILS:


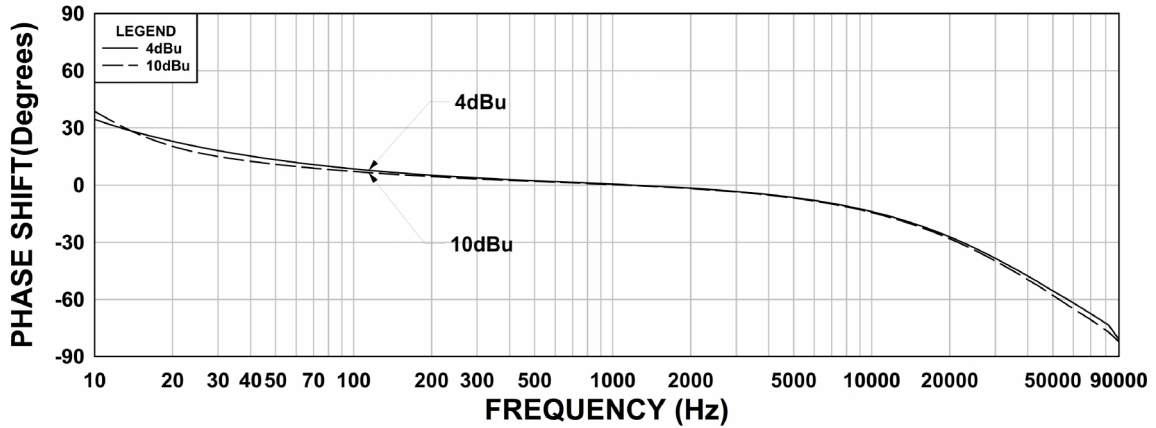
PERFORMANCE GRAPHS:

146H Frequency Response
RS = 500 Ohm RL = 3.2 Ohm @ 1KHz Reference



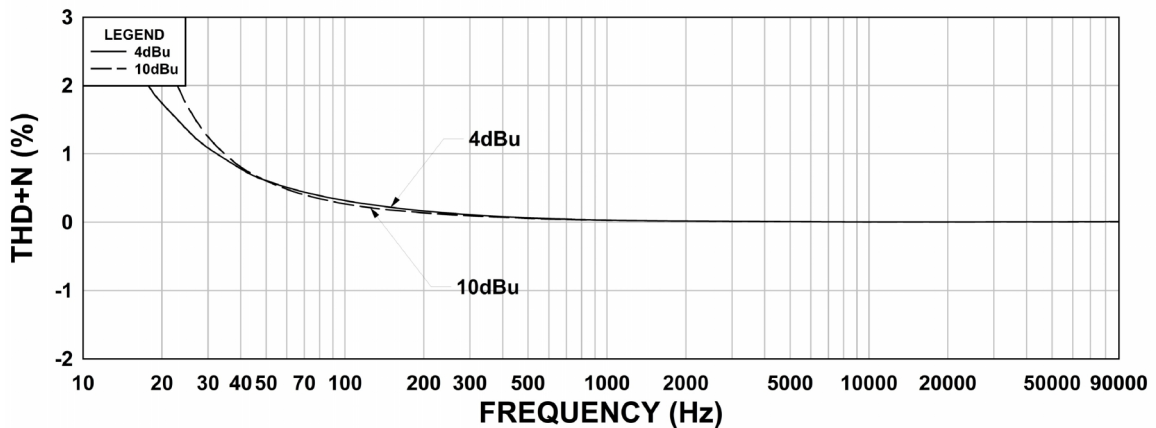
146H Phase Shift

RS = 500 Ohm RL = 3.2 Ohm @ 1KHz Reference



146H THD+N

RS = 500 Ohm RL = 3.2 Ohm @ 1KHz Reference



MEASUREMENT INSTRUMENTS

- dScope Series III Audio Analyzer
- Wayne Kerr 3255B with a 3265B Inductance Analyzer
- HP 4192a LF Impedance Analyzer
- Keithley 2010 DVM

**The results are typical and are subject to normal manufacturing and electrical tolerances.

TEST CONDITIONS

