




Quality Products. Service Excellence.

## Seismic 2-Post Open Frame Rack *DNRRHDW Series*

UL2416 rated for up to 1,500 lbs (680 kg). Static Load tested to 6,000 lbs (2,721 kg). Seismic rated up to 400 lbs (181 kg).

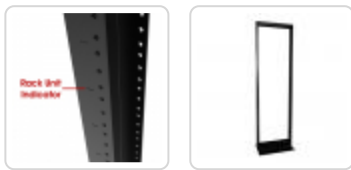

When strength and reliability are the highest priority, be sure to choose the DNRR Series from Hammond Manufacturing. Designed to support your rack-mount infrastructure, regardless of the application, the DNRR includes premium features not found on most other racks.

### Features

- Our premium 10-gauge welded steel frame construction is the most robust steel rack on the market.
- Weld locations are sanded for a smooth professional finish.
- Our tapping process provides EIA-compliant precision threaded rails included on both the front and back to ensure flexibility when mounting equipment.
- Every rack unit includes rack unit dividers to aid in equipment mounting.
- When connecting multiple racks together, numerous holes for mounting power distribution, cable management and other accessories are provided.
- Bonding is a breeze with two (2) pairs of integrated 10-32 ground studs, spaced 5/8" apart. Stud pairs are conveniently located across from each other inside the rail channel. For added convenience, a pair is located near the top of the rack, while the other pair is located at the lower side.
- To keep it looking great, the DNRR undergoes a five-stage paint process which includes a coat of premium smooth black powder paint.
- In order to prevent any damage that may occur during transportation, we cover the rails with a cardboard sleeve.



### Specifications

- Rack rails are constructed in 10-gauge welded steel. Base angles are constructed in 1/4" steel plates.
- UL Listed 2416 load rated for up to 1,500 lbs (680 kg). Static Load tested to 6,000 lbs (2,721 kg). Seismic rated up to 400 lbs (181 kg) of dynamic load with an Ip factor of 1.5 in accordance with the IBC 2018, CBC 2019, NBC 2018, ASCE 7-16 and ASCE 7-10. Requires a seismic bolt-down kit such as the **C4K-Z4** (sold separately).
- Finished in satin smooth RAL9005 black powder paint.
- TAA-compliant for GSA Schedule purchases.
- RoHS Compliant.
- Manufactured in North America within an ISO 9001:2015 certified facility.



**On a budget?** The **RB-2P** 2-Post Rack Series is 12-gauge steel and supports 1,000 lbs. [Click here to learn more.](#)



**Looking for even more weight capacity?** The **DRZ4** is UL rated for up to 2,000 lbs. [Click here to learn more.](#)

### Accessories

- High-Density Vertical Finger Manager with Slam-Latching Door
- Vertical Rack Cable Manager with Door
- Vertical Cable Manager Extensions
- Horizontal Finger Cable Manager
- Universal Rack Shelf
- Two Post Mounting Keyboard & Equipment Shelf
- Two-Post Extension Support Bracket
- Open Frame Rack and Rack Cabinet Joining Kit
- Rack Isolation Kit
- Mounting Hardware
- Vertical Finger Cable Manager with Door
- Top Wire Management
- Horizontal Ring Cable Manager
- Rack Panels
- Two Post Centered Shelf
- Two Post Heavy Duty Battery Shelf
- 2-Post Rack Low Profile Dolly
- Rack Rail Reducer Panel
- Grounding & Bonding
- PDUs and Outlet Strips

### 19" Rack Mounting 10-32 Double Tapped Rails

Part No.	Overall Dimensions			Rack Units	Mounting Dimensions			Rail Threading	Rack Basics Alternative
	Height	Width	Depth		Height	Width	Rail Depth		
DNRR63HDW	69.13	20.56	15.00	36U	63.00	19.00	3.00	10-32	-
DNRR70HDW	76.13	20.56	15.00	40U	70.00	19.00	3.00	10-32	-
DNRR77HDW	83.13	20.56	15.00	44U	77.00	19.00	3.00	10-32	RB-2P77
DNRR84HDW	90.13	20.56	15.00	48U	84.00	19.00	3.00	10-32	RB-2P84

### 23" Rack Mounting 12-24 Double Tapped Rails

Part No.	Overall Dimensions			Rack Units	Mounting Dimensions			Rail Threading	Rack Basics Alternative
	Height	Width	Depth		Height	Width	Rail Depth		
DNRR2377HDWB	83.13	24.56	15.00	44U	77.00	23.00	3.00	12-24	RB-2PA2345BK
DNRR2384HDWB	90.13	24.56	15.00	48U	84.00	23.00	3.00	12-24	-

Tags: Relay Rack, H-Frame, Server Rack, Equipment Rack, Network Rack, Skeleton Rack, Telco Rack, *Data subject to change without notice*  
**Two-Post Rack**

© 2022. Hammond Manufacturing Ltd. All rights reserved.