



Quality Products. Service Excellence.

Economy 2-Post Open Frame Rack *RB-2P Series*

UL2416 rated for up to 1,000 lbs (453 kg). Static Load tested to 4,000 lbs (1,814 kg).



RACK BASICS®




Features:

- Rack rails are constructed in 12-gauge welded steel. Base angles are constructed in 1/4" steel plates.
- 19" EIA compliant 10-32 double-tapped rails.
 - Includes marked rack unit dividers to aid in equipment mounting.
 - Don't forget to order your **Mounting Hardware**.
- The side of the mounting rails included ganging and accessory mounting holes.
- Two (2) pairs of 5/8" spaced 10-32 threaded ground studs are integrated into the rails. Stud pairs are conveniently located across from each other inside the rail channel. For added convenience, a pair is located near the top of the rack, while the other pair is located on the lower side.
- UL Listed 2416 load rated for up to 1,000 lbs (453 kg). Static Load tested to 4,000 lbs (1,814 kg).
- Finished in smooth RAL9005 black powder paint.
- Rails and base are packaged in cardboard to prevent freight damage.
- TAA-compliant for GSA Schedule purchases.
- RoHS Compliant.
- Manufactured in North America within an ISO 9001:2015 certified facility.

Part of the Rack Basics® line of economy rack solutions.

Gallery

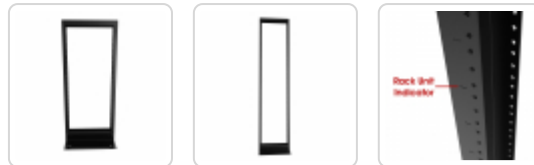

Accessories

- High-Density Vertical Finger Manager with Slam-Latching Door
- Vertical Rack Cable Manager with Door
- Top Wire Management
- Horizontal Finger Cable Manager
- Universal Rack Shelf
- Two Post Variable Depth Shelf
- Two Post Mounting Keyboard & Equipment Shelf
- 2-Post Rack Low Profile Dolly
- Rack Isolation Kit
- 10-32 Mounting Hardware
- Rackmount Adjustable Angle Bracket
- Vertical Finger Cable Manager with Door
- Vertical Cable Manager Extensions
- Horizontal Ring Cable Manager
- Rack Panels
- Two Post Mounting Adjustable Shelf
- Two Post Centered Shelf
- Two-Post Extension Support Bracket
- Open Frame Rack and Rack Cabinet Joining Kit
- Grounding & Bonding
- PDUs and Outlet Strips

Part No.	Overall Dimensions			Rack Units	Mounting Dimensions		Optional Vertical Cable Manager
	Height	Width	Depth		Height	Width	
RB-2P24	48.12	20.46	15.00	24U	42.16	19.00	RB-VCM24
RB-2P77	83.12	20.46	15.00	44U	77.12	19.00	RB-VCM44
RB-2P84	90.12	20.46	15.00	48U	84.16	19.00	RB-VCM48

Tags: **Relay Rack, H-Frame, Server Rack, Equipment Rack, Network Rack, Skeleton Rack, Telco Rack,** *Data subject to change without notice*
Two-Post Rack

© 2022. Hammond Manufacturing Ltd. All rights reserved.