


Isolation - Step Down (115VAC to 95VAC) 179 Serie

Plug In - "Classic" equipment or Japanese



Note: This product line has been discontinued as a stocked series on May 27, 2025. Information is for reference only. For alternative solution assistance, please **contact Hammond here** or call: USA (716) 630-7030, Canada and International (519) 822-2960.


Features



- Primary 115VAC, 50/60 Hz., Secondary 95VAC.
- Provides circuit isolation.
- Electrostatic shield between primary & secondary.
- World wide applications, 50 or 60 Hz. operation, step down (115VAC to 95 VAC).
- Designed mainly for Japanese equipment in North America.
- Perfect for operating "Classic" equipment that can not tolerate todays higher line voltages (ie..125 VAC input will produce a stress free 105 VAC output at full load PLUS isolation and shielding).
- Input (primary) connected to a 5 foot long cord and standard North American plug (NEMA 5-15P)
- Output (secondary) connected to two standard - 3 wire grounded receptacles.
 - Receptacles have North American pins. See our **298G adaptor series** for international pinout adaptor plugs.
- Features include ventilated black steel case, rocker lighted on-off switch & fuse protected output.
- Indoor use only.
- **Remember** - These units do NOT convert line frequency

Accesorios

- International Grounded Adaptor Plugs

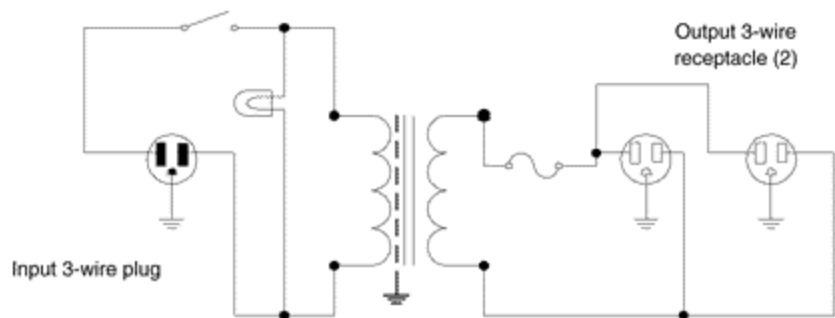

Part No.	Capacity	Outlet	Overall Dimensions		
	VA	Qty	A	B	C
179E	750	2	7.00	8.25	5.38
179F	1000	2	7.00	9.75	5.38
179G	1500	2	8.50	9.00	6.75

