


106 Series
MINIATURE EPOXY-POTTED AUDIO TRANSFORMER

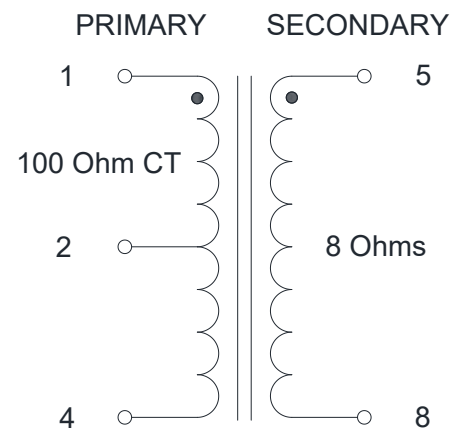
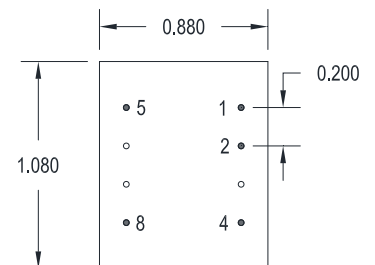

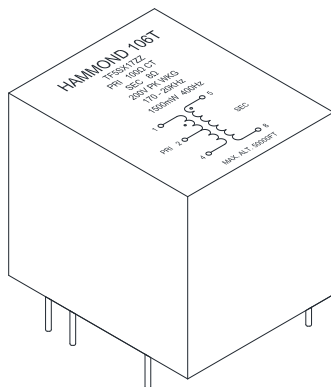
106T

Features:

- Bifilar winding technique used on center tapped units for balanced resistive and capacitive characteristics.
- Rugged black epoxy potted construction produces a completely sealed unit withstanding severe environmental conditions including those of MIL-T-27 (Grade 5, Class S).
- Frequency response: $\pm 1.0\text{dB}$ 170Hz – 20KHz @ 20dBu
- P.C. board mount - square pin type (0.025" square typical)
- Peak working voltage rating : 200Vp-p
- Maximum operating altitude : 50,000 ft.
- Weight: 1.44 oz.

ELECTRICAL SPECIFICATIONS

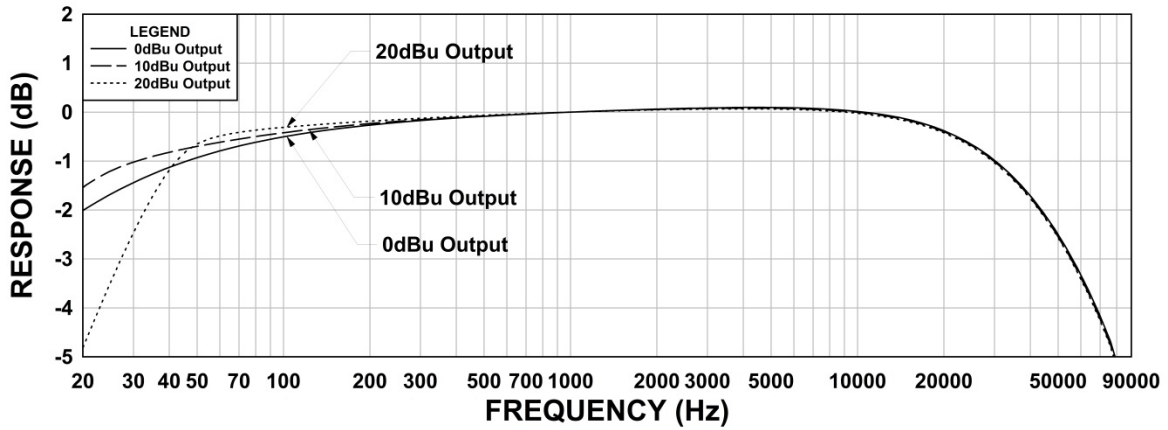
Characteristics	Typical
PRI Impedance	100 Ohms CT
SEC Impedance	8 Ohms
Output Power	1500mW
DCR Pin 1 - 2	2.214 Ohms $\pm 15\%$
DCR Pin 2 - 4	2.209 Ohms $\pm 15\%$
DCR Pin 5 - 8	0.670 Ohms $\pm 15\%$
Dielectric Strength	500V RMS
Temperature class	105°C
PRI Inductance Impedance	
1V @ 1KHz OC	
Pin 1 - 4	140.42mH 1.283K Ohms
PRI Leakage Inductance	
1V @ 1KHz SC	
Pin 1 - 4	756.5uH

SCHEMATIC DIAGRAM

DIMENSIONAL DETAILS:


PERFORMANCE GRAPHS:

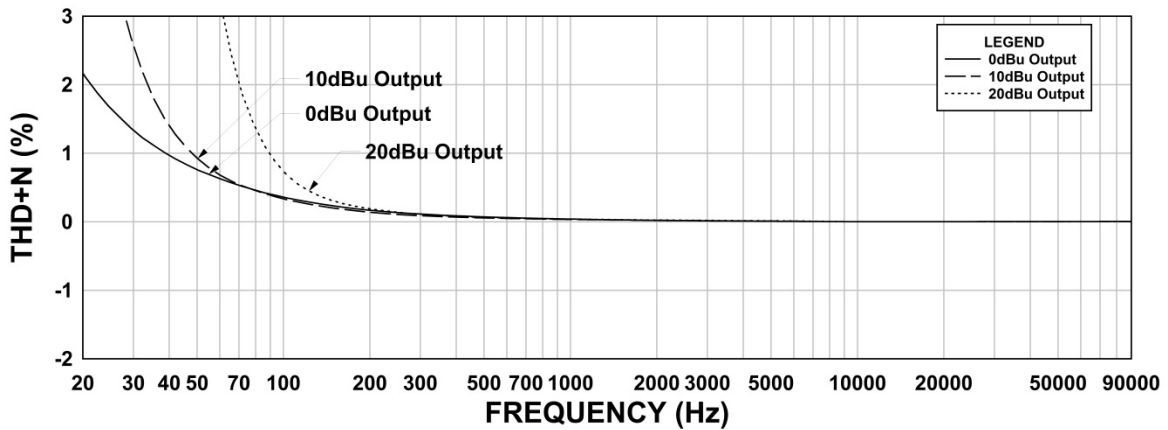
106T Frequency Response 170Hz-20KHz

RS = 100 Ohm RL = 8 Ohm @ 1KHz Reference



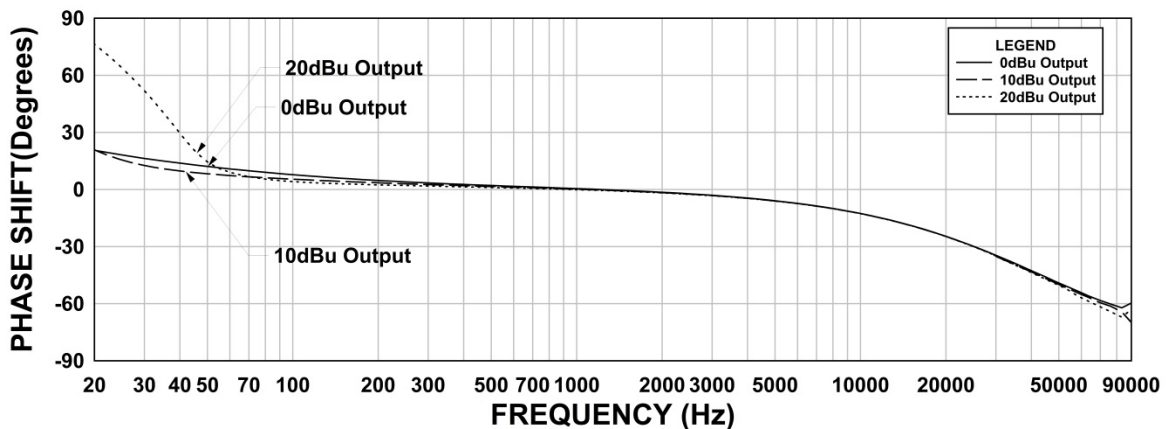
106T THD+N

RS = 100 Ohm RL = 8 Ohm @ 1KHz Reference



106T Phase Shift

RS = 100 Ohm RL = 8 Ohm @ 1KHz Reference



MEASUREMENT INSTRUMENTS

- dScope Series III Audio Analyzer
- Wayne Kerr 3255B with a 3265B Inductance Analyzer
- HP 4192a LF Impedance Analyzer
- Keithley 2010 DVM

**The results are typical and are subject to normal manufacturing and electrical tolerances.

TEST CONDITIONS

