


TOLERANCE, WHEN NOT STATED: ±0.031

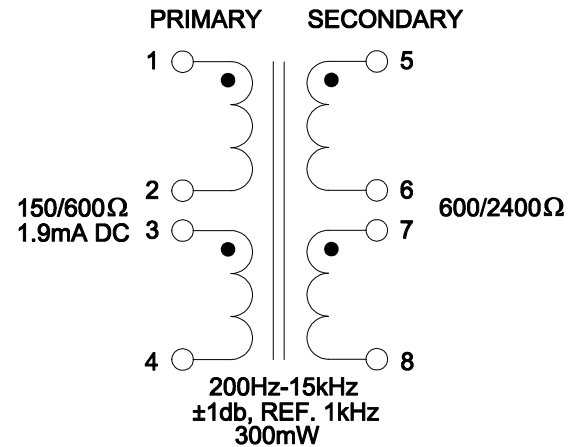

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 6.7V, 200Hz, PIN 1 - PIN 2	45mA	Max.
Sec. N.L.V	@ 6.7V, 200Hz, PIN 1 - PIN 2		
	PIN 5 - PIN 6 =	13.42V	±2%
	PIN 7 - PIN 8 =	13.42V	±2%
DCR	@ 20°C, PIN 1 - PIN 2 =	28.50 Ω	±15%
	@ 20°C, PIN 3 - PIN 4 =	28.50 Ω	±15%
	@ 20°C, PIN 5 - PIN 6 =	89.00 Ω	±15%
	@ 20°C, PIN 7 - PIN 8 =	89.00 Ω	±15%
HIPOT	PRIMARY - SECONDARY	250V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	C.I. 05/16/18	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: P.C. BOARD MOUNT AUDIO TRANSFORMER
			DATE: 05/16/18	APP'D. BY:	
				DIMENSIONS: IN(X) MM()	DWG. NO. 148A