




SECTION A-A  
(VIEW FROM FRONT)

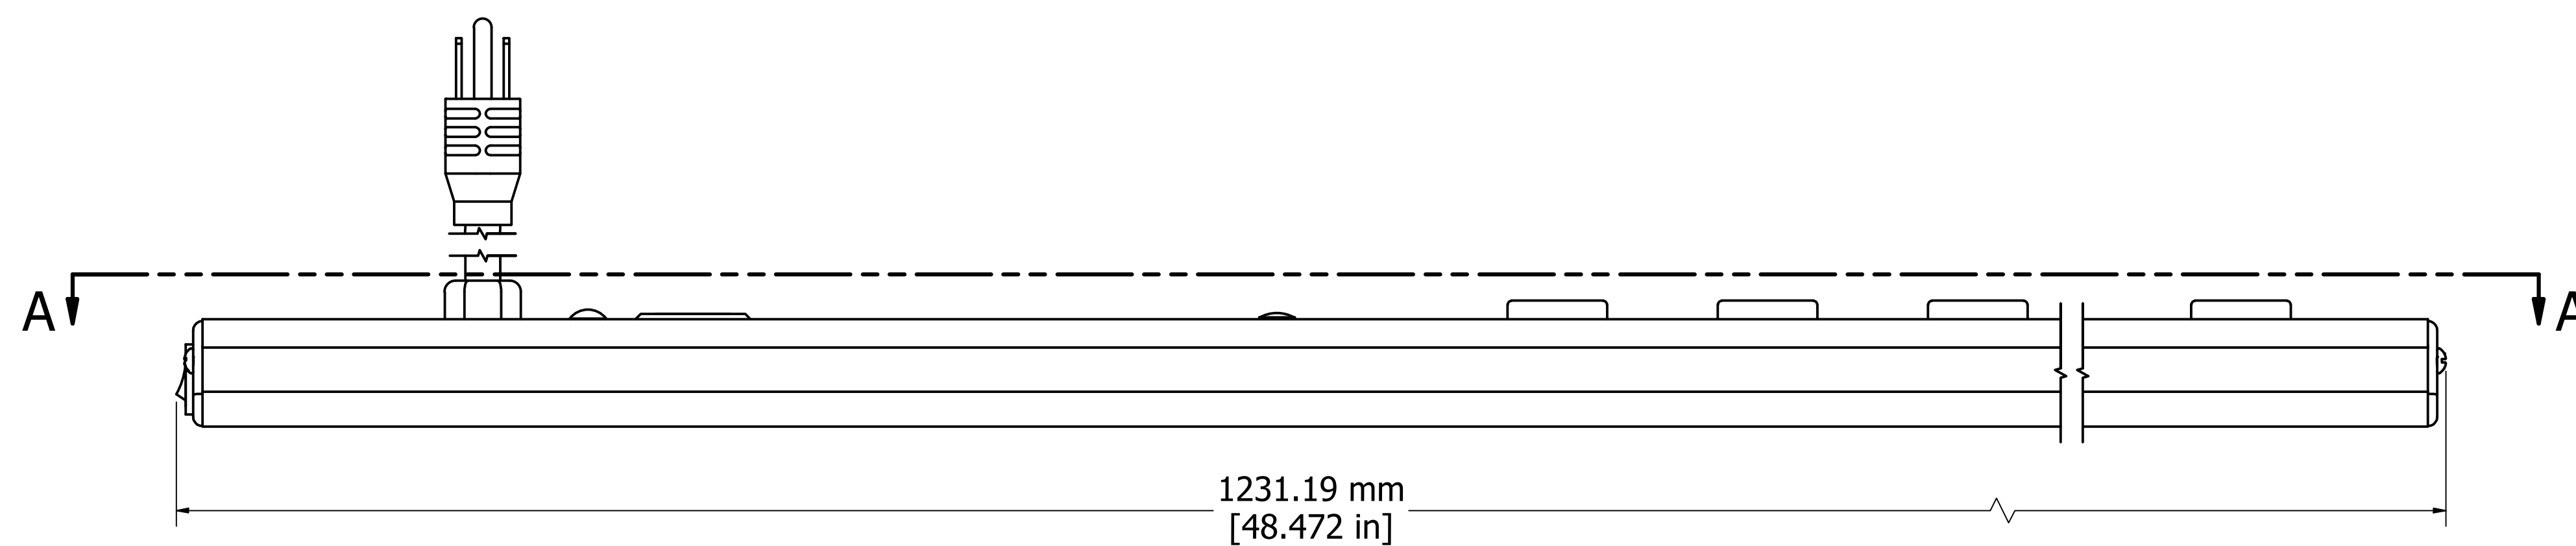

ASSEMBLY - VIEW FROM SIDE

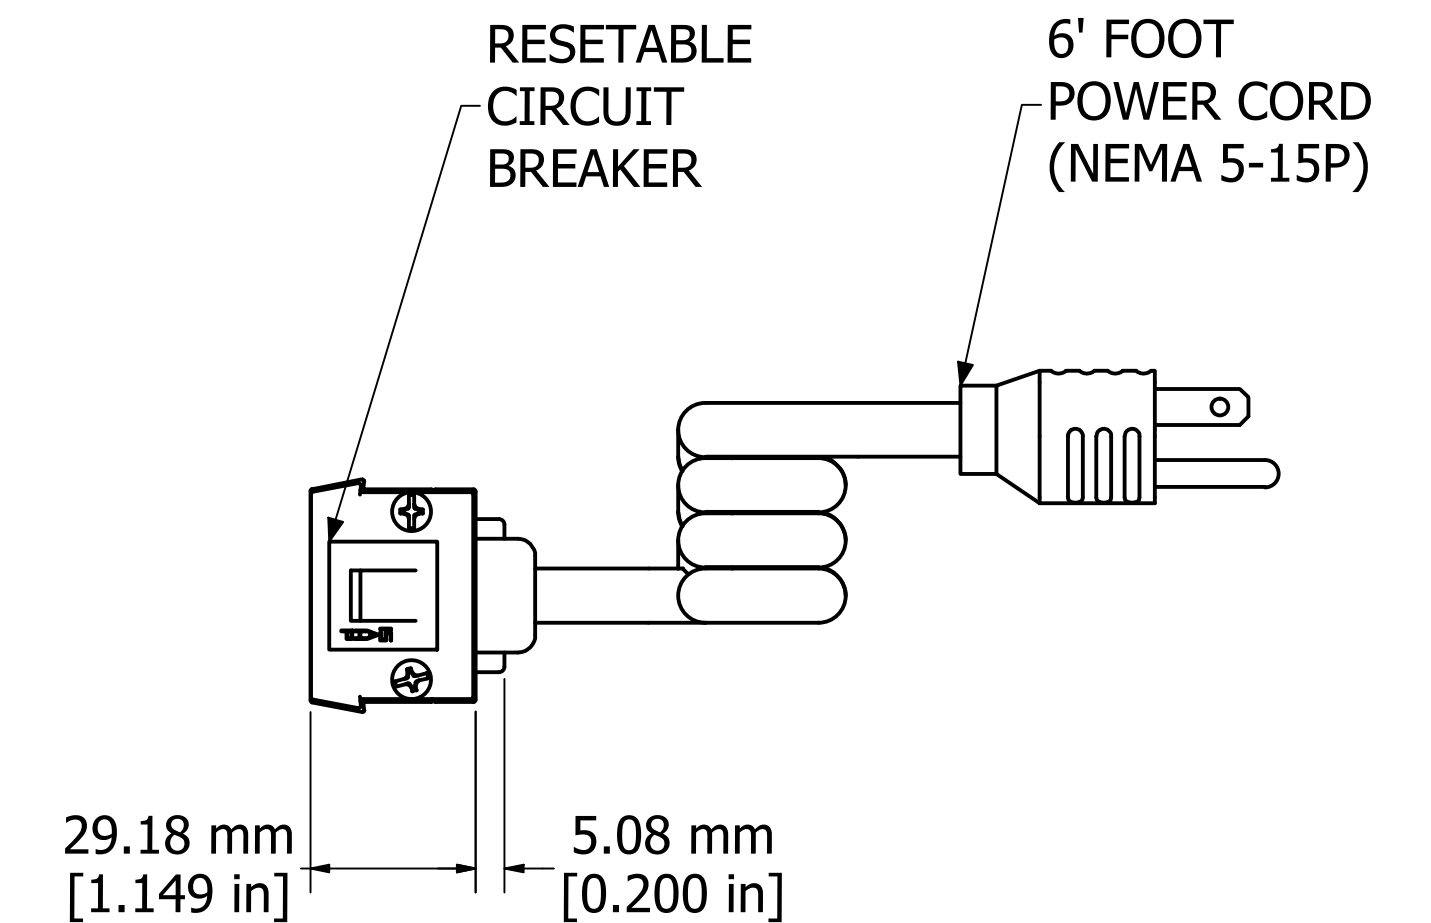

ASSEMBLY - VIEW FROM END

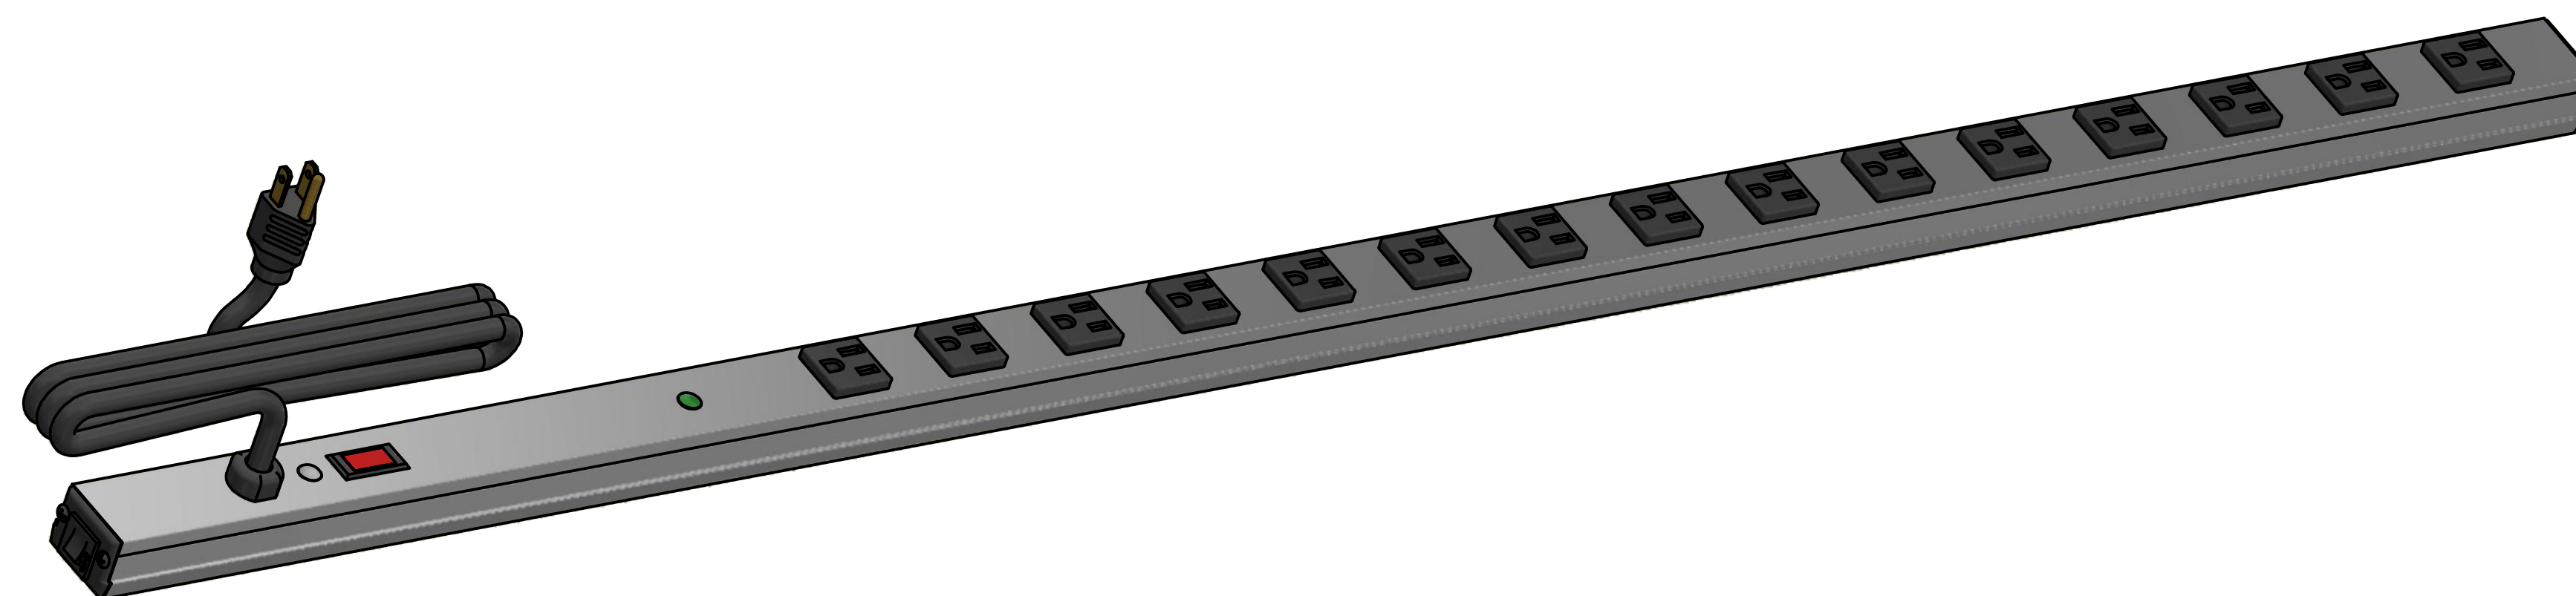

ISOMETRIC VIEW

1585T15A1S	
Finish - Case - Anodized Aluminum Extrusion	
Ends - ABS Plastic	
Rated - 125 VAC, 60 Hz, 15 Amps	
Approvals - cULus Listed to: UL1449 & C22.2 No. 269.3-17	
Surge Specs - 1080 Joules, 75000 Amps Transient Current	
- 500V Voltage Protection Rating (VPR)	
Accessories Included	
Mounting Bracket Kit with Hardware	



**HAMMOND  
MANUFACTURING™**  
**1585T15A1S**  
www.hammondmfg.com