


FOR 1400ΩCT JOIN TOGETHER BLU/YEL & WHT/BLU, RED & RED/YEL, WHT/BRN & BRN/YEL
 INPUT: BLU TO BRN; RED & RED/YEL - CT
 BLU/YEL & WHT/BLU AND WHT/BRN & BRN/YEL ARE SCREEN TAPS

FOR 800ΩCT JOIN TOGETHER RED & RED/YEL
 INPUT: WHT/BLU TO WHT/BRN; RED & RED/YEL - CT
 NO SCREEN TAPS AVAILABLE FOR THIS INPUT VALUE

NOTE: ALL LEADS 8" OUT MIN., STRIP .25".

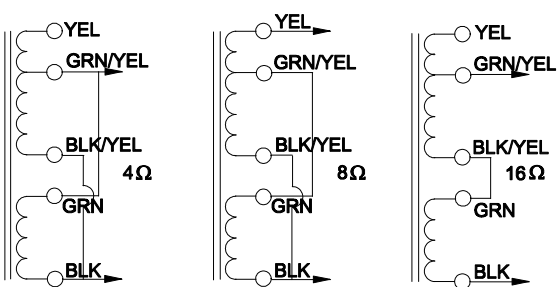

SECONDARY CONNECTIONS

DIMENSIONS:	
A	3.125" ±0.063
B	4.185" ±0.125
C	3.796" ±0.063
D	2.500" ±0.063
E	2.938" ±0.063
G	0.203" x 0.400" ±0.015

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 290V, 60Hz, BLU - BRN	7.2mA Max.
Sec. N.L.V	@ 290V, 60Hz, BLU - BRN	WT/BR & BR/YL TOGETHER
	BLU - BLU/YEL =	35.37V ±2%
	BLU - RED = RED - BRN =	145.0V ±2%
	BLU - BRN/YEL =	254.6V ±2%
	BLK - GRN =	15.49V ±2%
	BLK/YEL - GRN/YEL =	15.49V ±2%
	BLK/YEL - YEL =	21.93V ±2%
DCR	@ 20°C, BLU - BRN =	44.35 Ω ±20%
	@ 20°C, BLK - GRN =	0.165 Ω ±20%
	@ 20°C, BLK/YEL - YEL =	0.269 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED. C.I.	04/05/17

HAMMOND MANUFACTURING™ ELECTRONIC DIVISION
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: PUSH-PULL	DWG. NO.
DATE: 04/05/17	APP'D. BY:	OUTPUT TRANSFORMER	1650M
	DIMENSIONS: IN(X) MM()		