


EDB165V22

DIMENSIONS:

A	4.500" ±0.063
B	4.600" Max
C	3.750" ±0.063
D	3.750" ±0.063
E	3.750" ±0.063
F	4.500" ±0.063
G	0.281" X 0.562" ±0.015

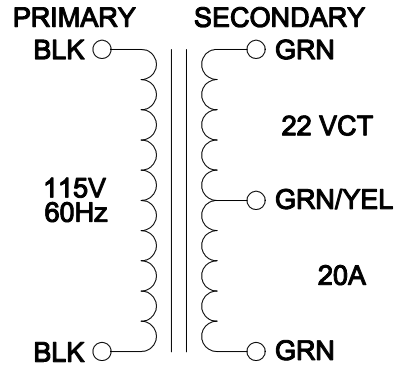


Electrical specifications:

Magnetizing current @115V 60, Hz =360 mA max

No load secondary voltage @ 115V = 23.55Vac

Efficiency: 93 %

Dielectric strength : 2000 Vac, Primary to Sec.

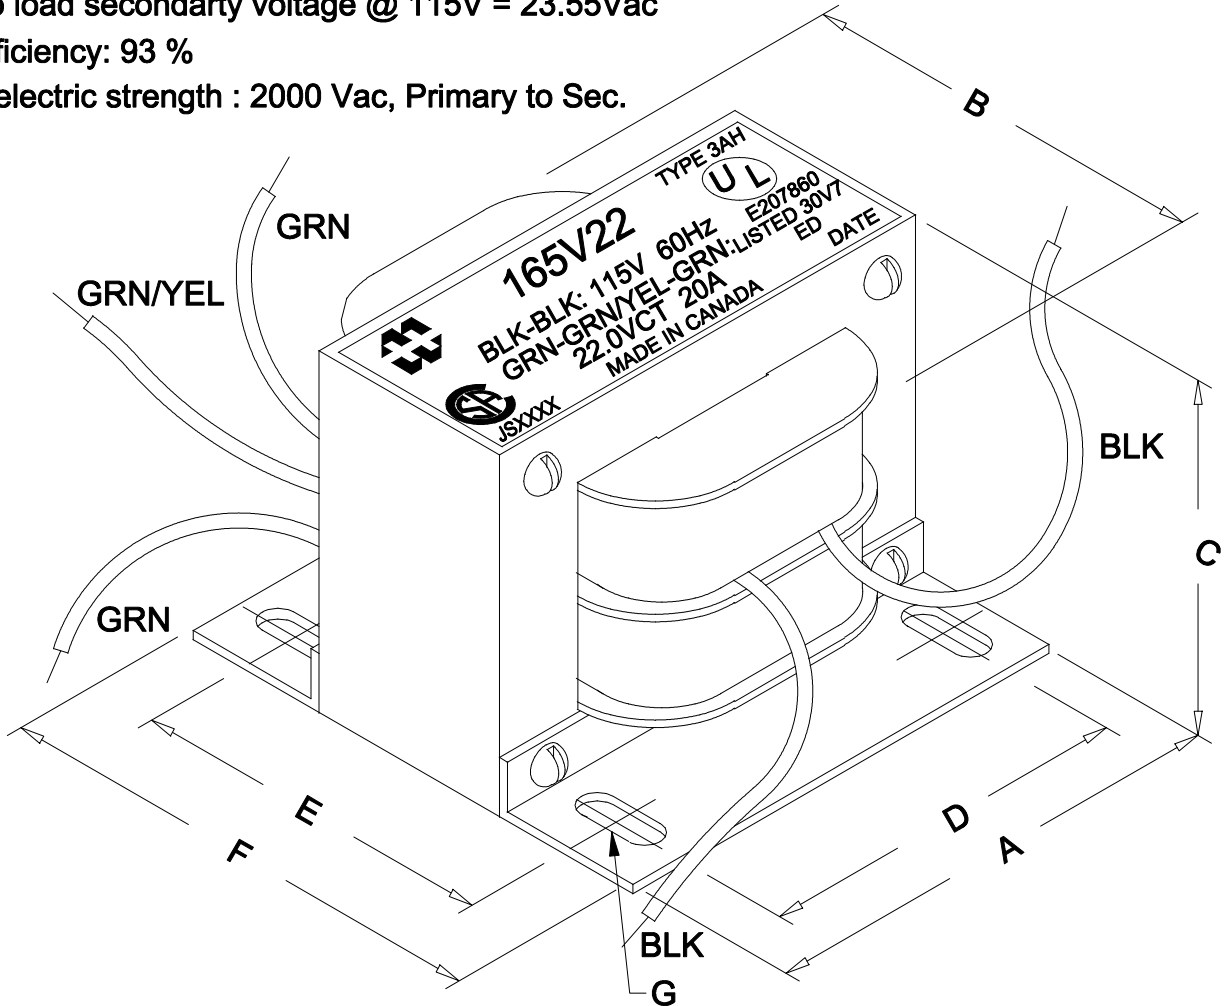

BLK PRIMARY LEADS: #18 AWG TEW STRANDED.

GRN & GRN/YEL SECONDARY LEADS: #12 AWG TEW STRANDED.



ELECTRONIC DIVISION
 52 RANKIN PLACE,
 WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181
 FAX # (519) 886-9540

TITLE

165V22

NO	DATE	REVISION	DWG. BY
0	01/21/11	RELEASED. C.I.	CORINA ILIE
			DATE
			01/21/11
			DIM IN(Ø)MM()

EDB165V22