



DIMENSIONS:	
A	2.063" ±0.063
B	1.350" ±0.125
C	1.245" ±0.063
D	1.750" ±0.063
E	0.576" ±0.063
F	1.451" ±0.063
G	0.187" ±0.015

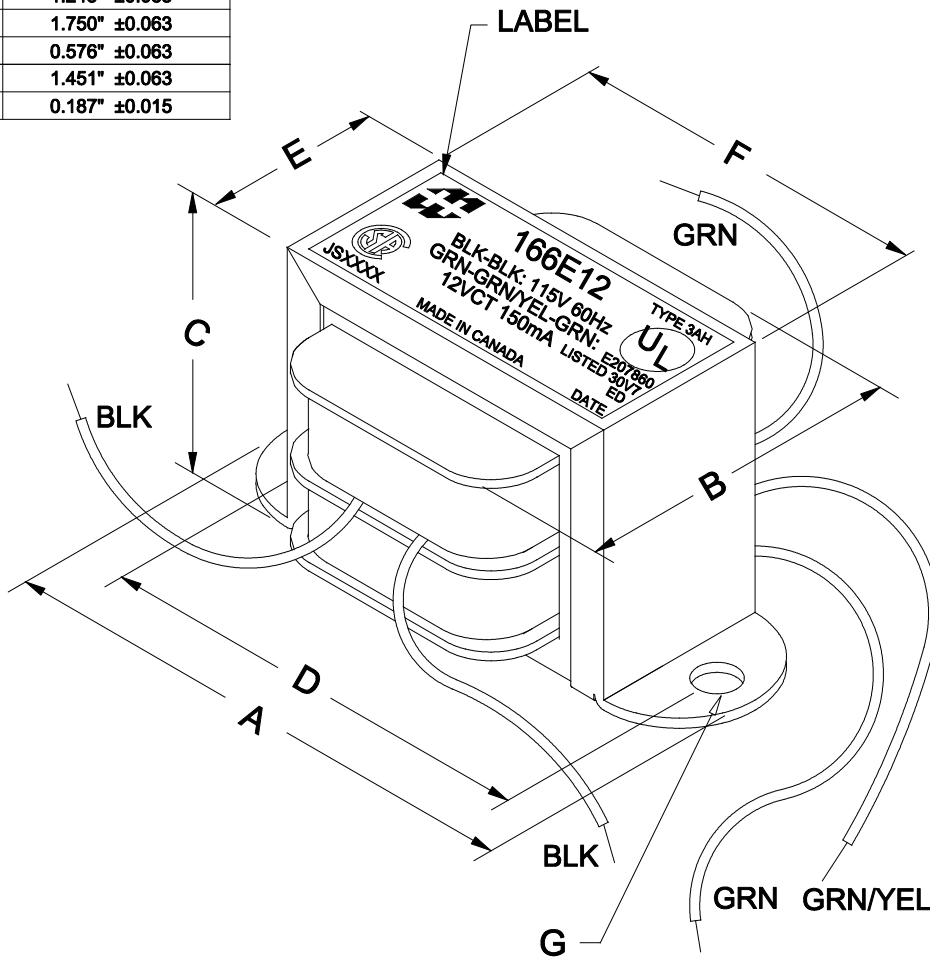

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 115V, 60Hz, BLK - BLK	27.6mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	14.46V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	7.229V ±2%
DCR	@ 20°C, BLK - BLK =	340.9 Ω ±20%
	@ 20°C, GRN - GRN =	6.422 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181
0	RELEASED.	C.I. 02/03/15	MANUFACTURING™				FAX # (519) 886-9540
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 166E12	
			DATE: 02/03/15	APP'D. BY:			
				DIMENSIONS: IN(X) MM()			