



DIMENSIONS:	
A	2.375" ±0.063
B	1.350" ±0.125
C	1.433" ±0.063
D	2.000" ±0.063
E	0.576" ±0.063
F	1.701" ±0.063
G	0.187" ±0.015

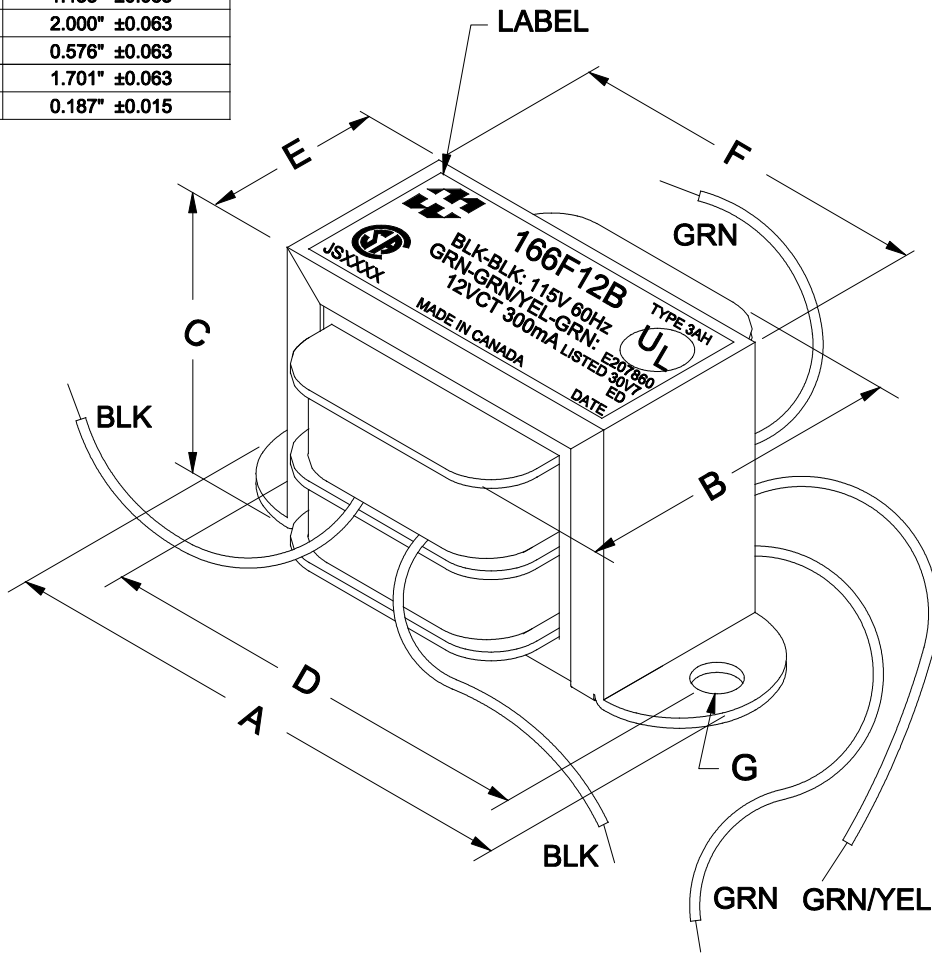

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 115V, 60Hz, BLK - BLK	34.8mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	13.66V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	6.832V ±2%
DCR	@ 20°C, BLK - BLK =	155.1 Ω ±20%
	@ 20°C, GRN - GRN =	2.736 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION	
0	RELEASED. C.I.	02/11/15	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	
			PH # (519) 886-6181	FAX # (519) 886-9540
			DWG. BY: C. ILIE	CHK'D BY:
			DATE: 02/11/15	APP'D. BY:
			DIMENSIONS: IN(X) MM()	
			TITLE: POWER TRANSFORMER	DWG. NO. 166F12B