



DIMENSIONS:	
A	3.125" ±0.063
B	3.436" ±0.125
C	3.766" ±0.063
D	2.500" ±0.063
E	2.188" ±0.063
G	0.203" X 0.400" ±0.015

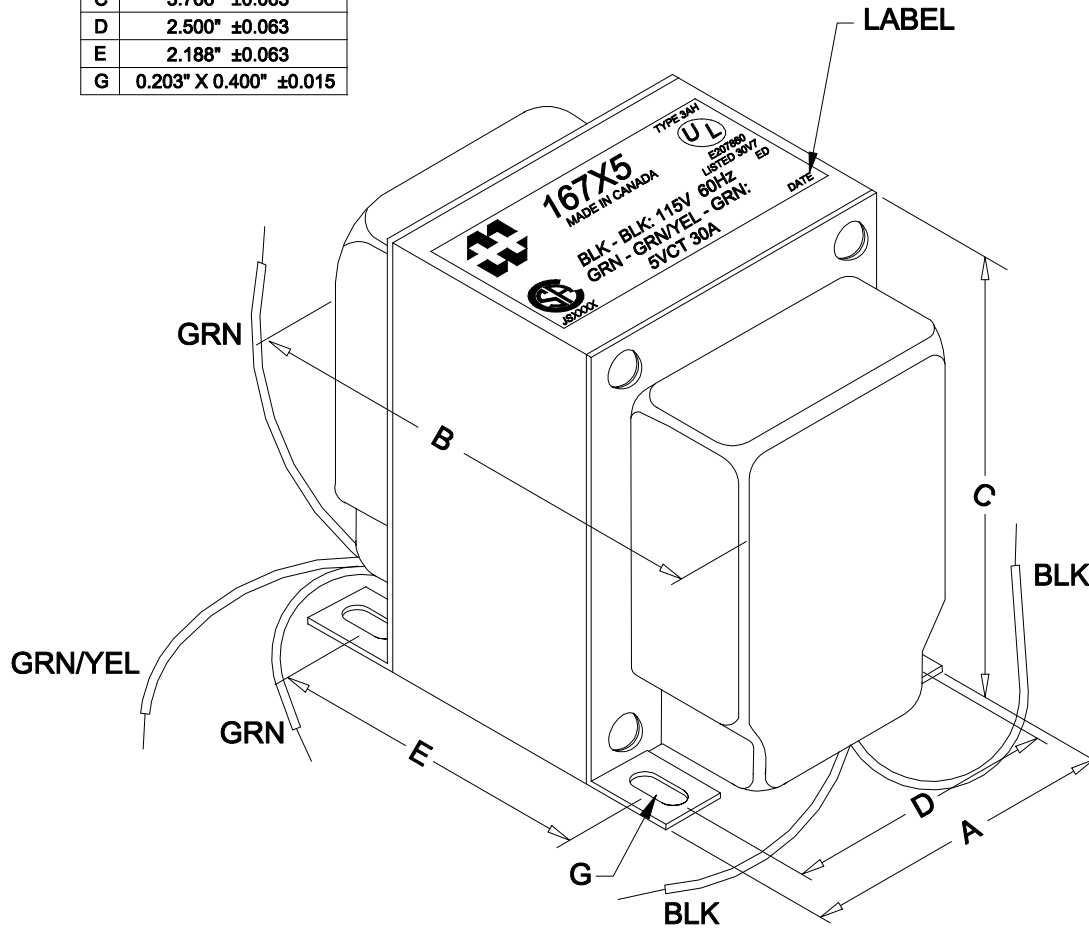

NOTE: ALL LEADS 8" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 115V, 60Hz, BLK - BLK	395mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	GRN - GRN =	5.261V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	2.631V ±2%
DCR	@ 20°C, BLK - BLK =	1.764 Ω ±20%
	@ 20°C, GRN - GRN =	0.004 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		
0	RELEASED. C.I.	06/05/18	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		
			PH # (519) 886-6181 FAX # (519) 886-9540		
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER
			DATE: 06/05/18	APP'D. BY:	DWG. NO. 167X5
				DIMENSIONS: IN(X) MM()	