
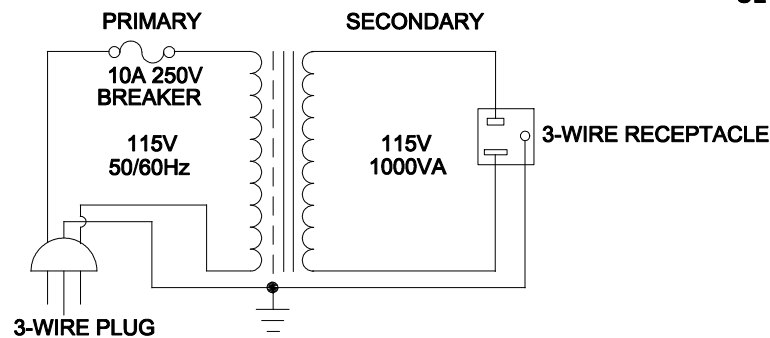
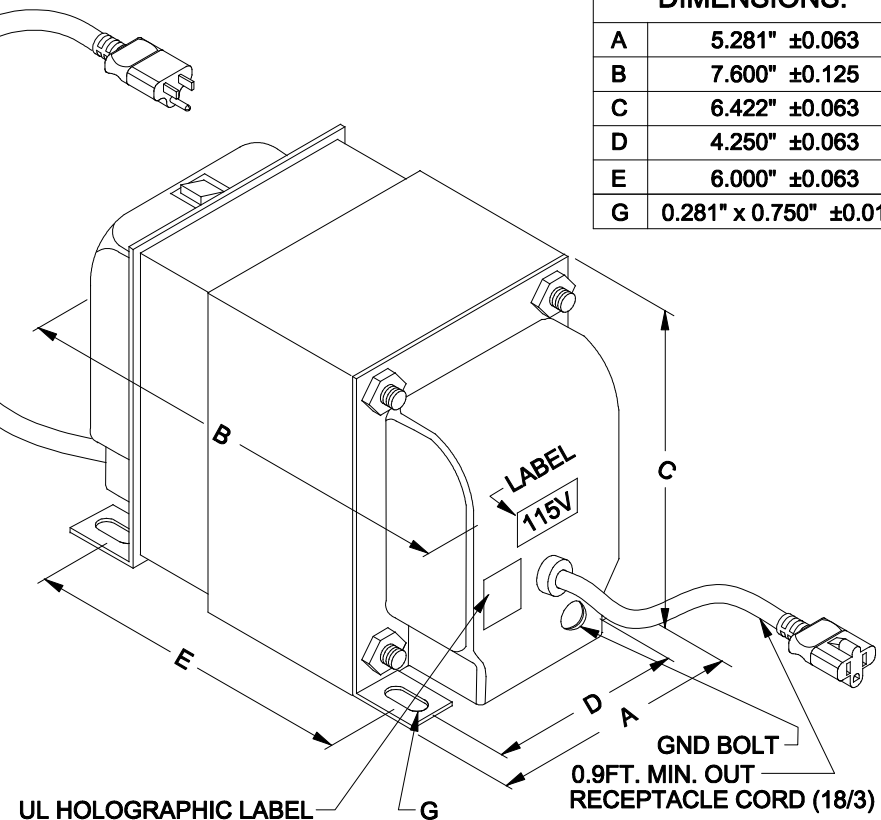


HAMMOND MANUFACTURING. LINE ISOLATION TX.
171G
 INPUT 115V 50/60Hz 1000VA
 SHIELDED
 OUTPUT 115V 8.7A
 MADE IN CANADA
 U.L./us LISTED (POWER SUPPLY) 89PN
 DATE

DIMENSIONS:	
A	5.281" ±0.063
B	7.600" ±0.125
C	6.422" ±0.063
D	4.250" ±0.063
E	6.000" ±0.063
G	0.281" x 0.750" ±0.015

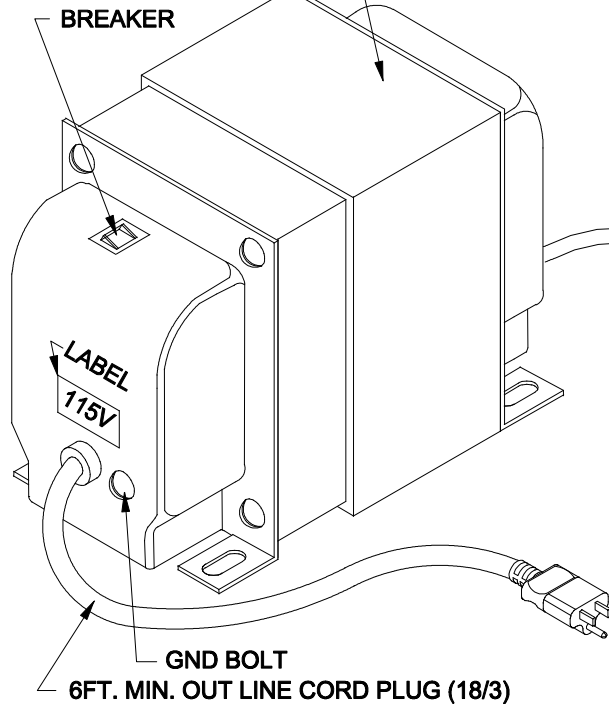

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, TO CORD PLUG	1A	Max.
Sec. N.L.V	@ 115V, 60Hz, TO CORD PLUG		
	RECEPTACLE PLUG =	117.5V	±2%
DCR	@ 20°C, TO CORD PLUG =	0.114 Ω	±20%
	@ 20°C, RECEPTACLE PLUG =	0.134 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	ELECTRONIC DIVISION			
0	RELEASED.	C.I. 09/30/20	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE:	DWG. NO.
			DATE: 09/30/20	APP'D. BY:	LINE ISOLATION TX. PLUG & RECEPTACLE	171G
				DIMENSIONS: IN(X) MM()		

HAMMOND MANUFACTURING™