
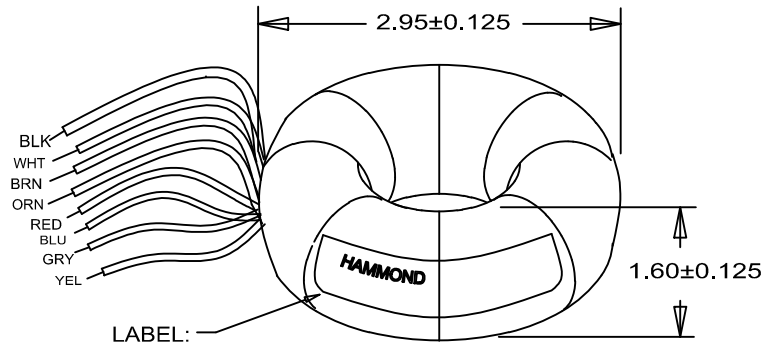


ALTERNATE MOUNTING CAN BE SUPPLIED WITH
EPOXY FILLED CENTER HOLE FOR 5/16 BOLT

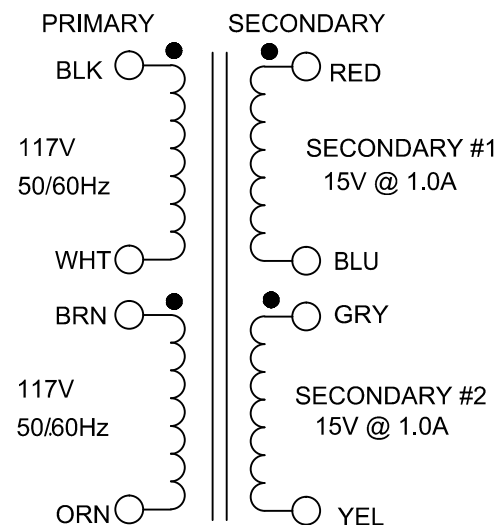

NOTE: ALL LEADS OUT 8.0" MIN. & STRIPPED .5"

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 117V, 60Hz, BLK/BRN - WHT/ORG	20mA	Max.
Sec. N.L.V	@ 117V, 60Hz, BLK/BRN - WHT/ORG		
	RED - BLU =	16.6V	±5%
	GRY - YEL =	16.8V	±5%
DCR	@ 20°C, WHT - BLK =	32.1 Ω	±20%
	@ 20°C, BRN - ORG =	32.1 Ω	±20%
	@ 20°C, RED - BLU =	0.62 Ω	±20%
	@ 20°C, GRY - YEL =	0.66 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC	
	PRIMARY - PRIMARY	600V, 60Hz, 1 SEC	
	SECONDARY - SECONDARY	600V, 60Hz, 1 SEC	

PROPERTY AND COPYRIGHT NOTICE
THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.

REV.#	REVISION	DATE	ELECTRONIC DIVISION			
0	RELEASED.	09/15/2010	52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C.BACIK	CHK'D BY:	TITLE: 182j15 TRANSFORMER	DWG. NO. 182J15
			DATE: 09/02/2010	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		

