
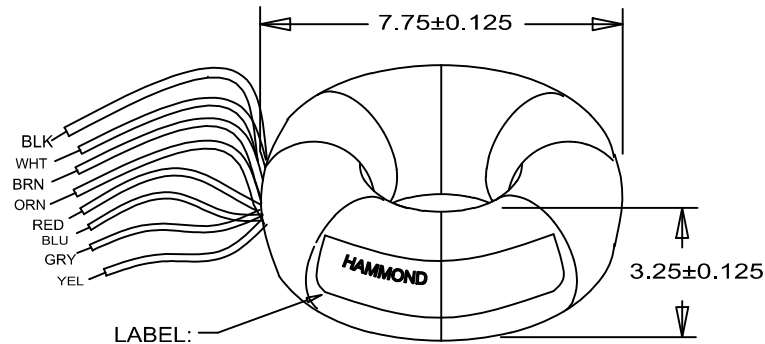
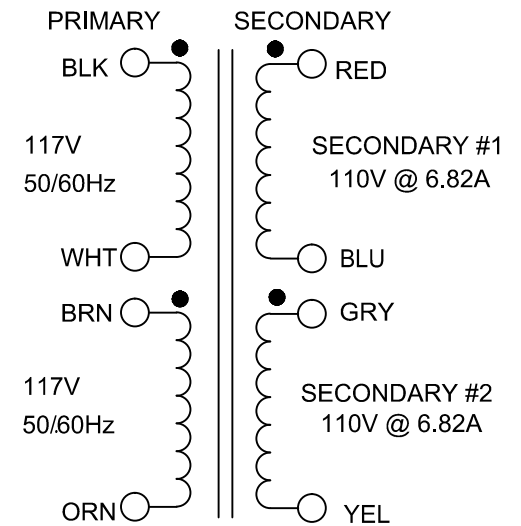


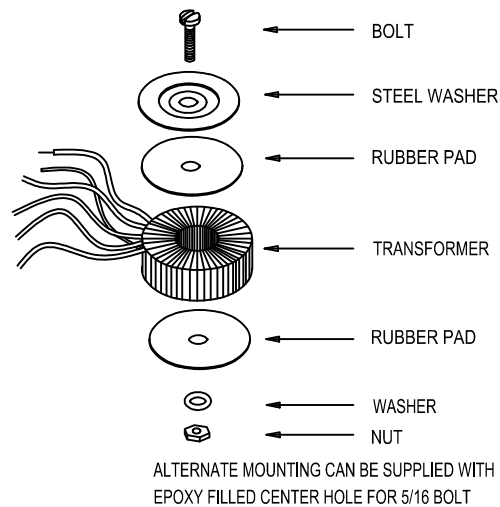

NOTE: ALL LEADS OUT 8.0" MIN. & STRIPPED .5"

PROPERTY AND COPYRIGHT NOTICE
 THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 117V, 60Hz, BLK/BRN - WHT/ORG	260mA	Max.
Sec. N.L.V	@ 117V, 60Hz, BLK/BRN - WHT/ORG		
	RED - BLU =	112.4V	±3%
	GRY - YEL =	112.4V	±3%
DCR	@ 20°C, WHT - BLK =	0.09 Ω	±20%
	@ 20°C, BRN - ORG =	0.10 Ω	±20%
	@ 20°C, RED - BLU =	0.17 Ω	±20%
	@ 20°C, GRY - YEL =	0.19 Ω	±20%
HIPOT	PRIMARY - SECONDARY	4000V, 60Hz, 1 SEC	
	PRIMARY - PRIMARY	600V, 60Hz, 1 SEC	
	SECONDARY - SECONDARY	600V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	 ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5 PH # (519) 886-6181 FAX # (519) 886-9540			
0	RELEASED.	09/02/2010				
			DWG. BY: C.BACIK	CHK'D BY:	TITLE: 182U110 TRANSFORMER	DWG. NO. 182U110
				APP'D. BY:		
			DATE: 09/02/2010	DIMENSIONS: IN(X) MM()		