
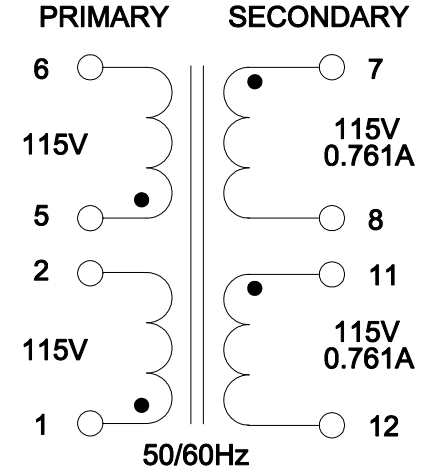


| DIMENSIONS: | |
|-------------|------------------------|
| A | 3.125" ±0.063 |
| B | 3.195" ±0.063 |
| C | 3.750" ±0.063 |
| D | 2.500" ±0.063 |
| E | 2.500" ±0.063 |
| F | 3.062" ±0.063 |
| G | 0.203" x 0.375" ±0.015 |
| H | 3.125" ±0.063 |
| J | 2.506" ±0.063 |
| K | 3.250" ±0.063 |
| L | 3.172" ±0.063 |

MTG. SCREW: #10
WEIGHT: APPROX. 5 LBS.

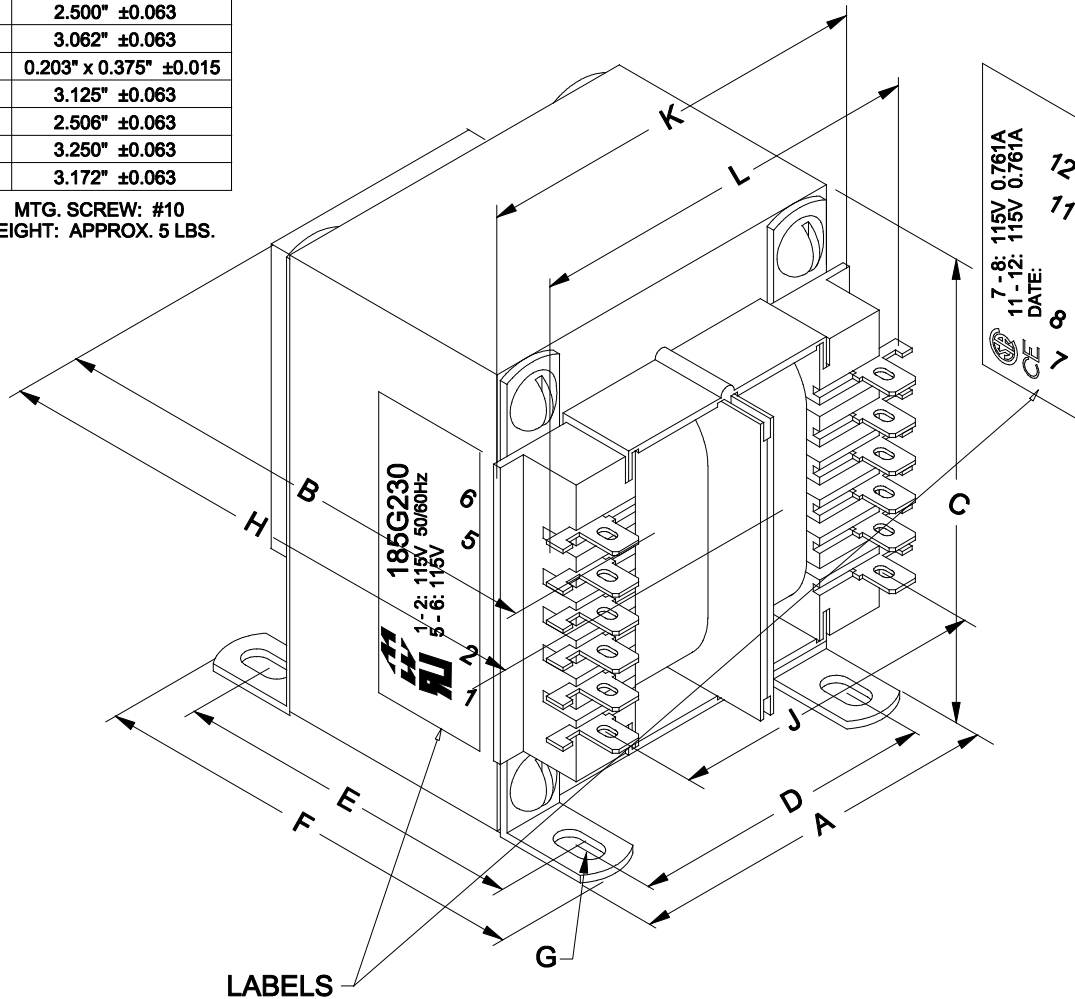

FOR 230V:
CONNECT PIN 2 & PIN 5
FOR 115V:
CONNECT PIN 1 & PIN 5
PIN 2 & PIN 6

FOR SERIES 230VCT @ 0.761A
CONNECT PIN 8 & PIN 11
FOR PARALLEL 115V @ 1.522A
CONNECT PIN 7 & PIN 11,
PIN 8 & PIN 12

| ELECTRICAL DATA: | | |
|------------------|-----------------------------|---------------------|
| TESTS | CONDITIONS | ACCEPTANCE CRITERIA |
| lex | @ 115V, 60Hz, PIN 1 - PIN 2 | 175mA Max. |
| Sec. N.L.V | @ 115V, 60Hz, PIN 1 - PIN 2 | |
| | PIN 5 - PIN 6 = | 115.0V ±2% |
| | PIN 7 - PIN 8 = | 124.1V ±2% |
| | PIN 11 - PIN 12 = | 124.1V ±2% |
| DCR | @ 20°C, PIN 1 - PIN 2 = | 3.466 Ω ±20% |
| | @ 20°C, PIN 5 - PIN 6 = | 3.466 Ω ±20% |
| | @ 20°C, PIN 7 - PIN 8 = | 3.833 Ω ±20% |
| | @ 20°C, PIN 11 - PIN 12 = | 3.833 Ω ±20% |
| HIPOT | PRIMARY - SECONDARY | 4000V, 60Hz, 1 SEC |

| REV.# | REVISION | DATE |
|-------|----------------|----------|
| 0 | RELEASED. C.I. | 11/30/18 |

HAMMOND MANUFACTURING ELECTRONIC DIVISION
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE CHK'D BY: _____
 DATE: 11/30/18 APP'D. BY: _____
 DIMENSIONS: IN(X) MM()

TITLE: CHASSIS MOUNT POWER TRANSFORMER DWG. NO. 185G230