
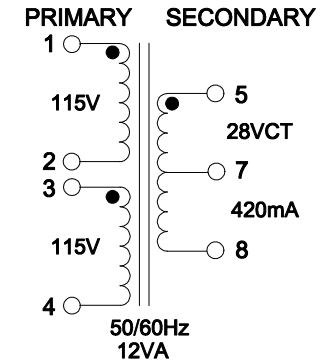


DIMENSIONS:

A	2.813" ±0.063
B	1.415" ±0.125
C	1.683" ±0.063
D	2.375" ±0.063
E	1.774" ±0.063
G	0.187" ±0.015
H	1.063" ±0.031
J	0.187 X 0.250" ±0.015

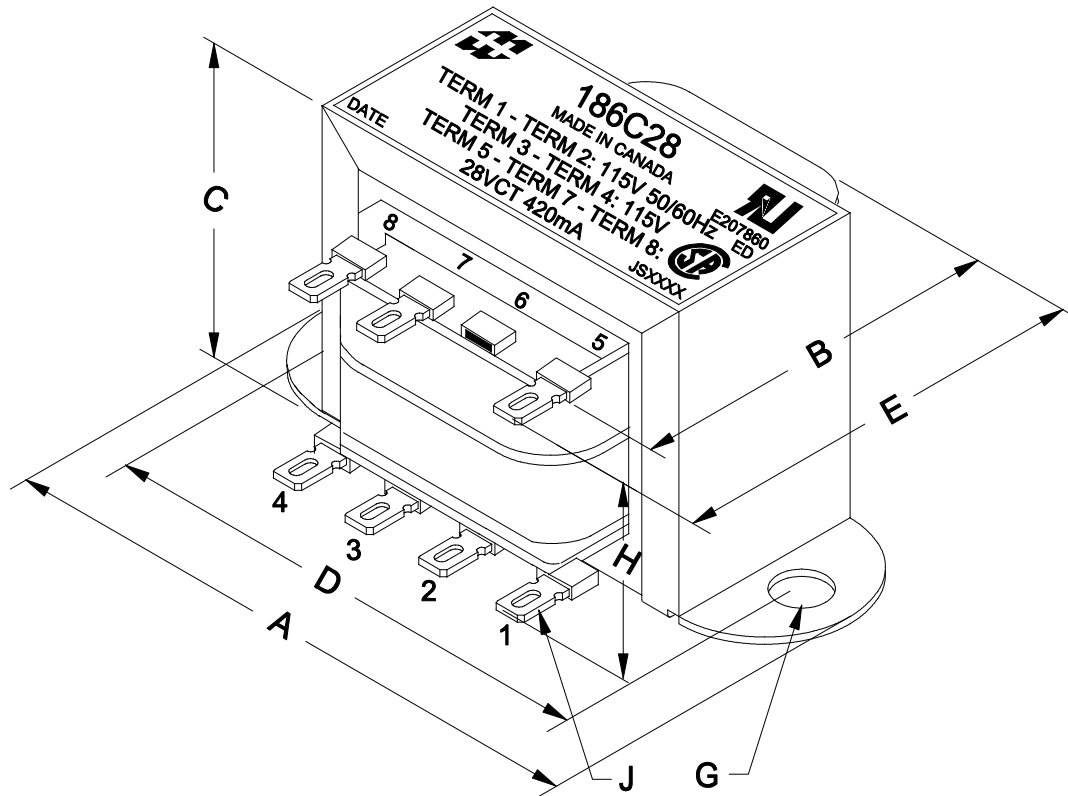

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
Iex	@ 115V, 60Hz, TERM 1 - TERM 2	95mA	Max.
Sec. N.L.V	@ 115V, 60Hz, TERM 1 - TERM 2		
	TERM 3 - TERM 4 =	115.0V	±2%
	TERM 5 - TERM 8 =	32.58V	±2%
	TERM 5 - TERM 7 = TERM 7 - TERM 8 =	16.29V	±2%
DCR	@ 20°C, TERM 1 - TERM 2 =	101.5 Ω	±20%
	@ 20°C, TERM 3 - TERM 4 =	120.9 Ω	±20%
	@ 20°C, TERM 5 - TERM 8 =	4.800 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE
0	RELEASED.	C.I. 12/03/20

HAMMOND ELECTRONIC DIVISION
MANUFACTURING™
 52 RANKIN PLACE,
 WATERLOO, ONTARIO, N2J 3Z5
 PH # (519) 886-6181
 FAX # (519) 886-9540

DWG. BY: C. ILIE
 DATE: 12/03/20

CHK'D BY:
 APP'D. BY:
 DIMENSIONS: IN(X) MM()

TITLE: POWER TRANSFORMER

DWG. NO. 186C28