



DIMENSIONS:

A	3.250" ±0.063
B	1.730" ±0.125
C	1.995" ±0.063
D	2.813" ±0.063
E	2.089" ±0.063
G	0.187" ±0.015

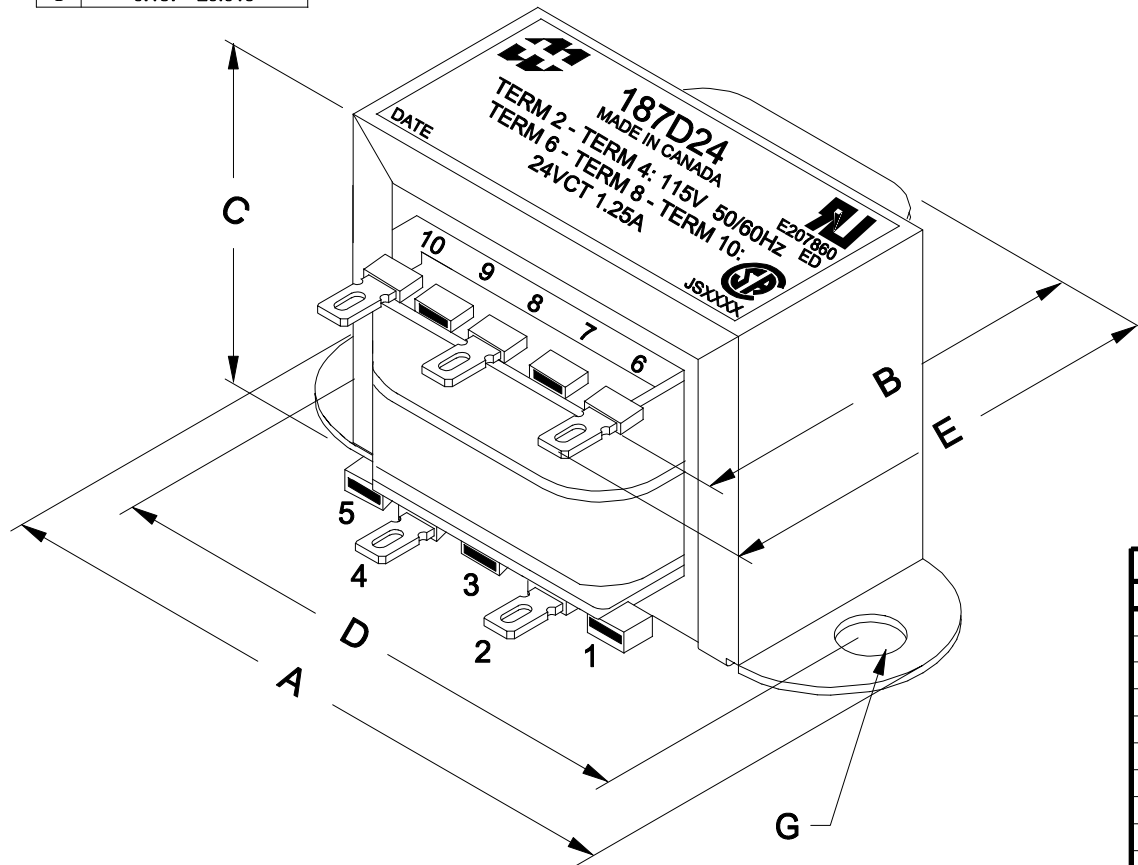

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, TERM 2 - TERM 4	167mA	Max.
Sec. N.L.V	@ 115V, 60Hz, TERM 2 - TERM 4		
	TERM 6 - TERM 10 =	26.78V	±2%
	TERM 6 - TERM 8 = TERM 8 - TERM 10 =	13.39V	±2%
DCR	@ 20°C, TERM 2 - TERM 4 =	17.06 Ω	±20%
	@ 20°C, TERM 6 - TERM 10 =	0.970 Ω	±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 05/02/16	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 187D24
			DATE: 05/02/16	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		