



DIMENSIONS:	
A	4.031" ±0.063
B	2.220" ±0.125
C	2.620" ±0.063
D	3.563" ±0.063
E	2.580" ±0.063
G	0.187" ±0.015

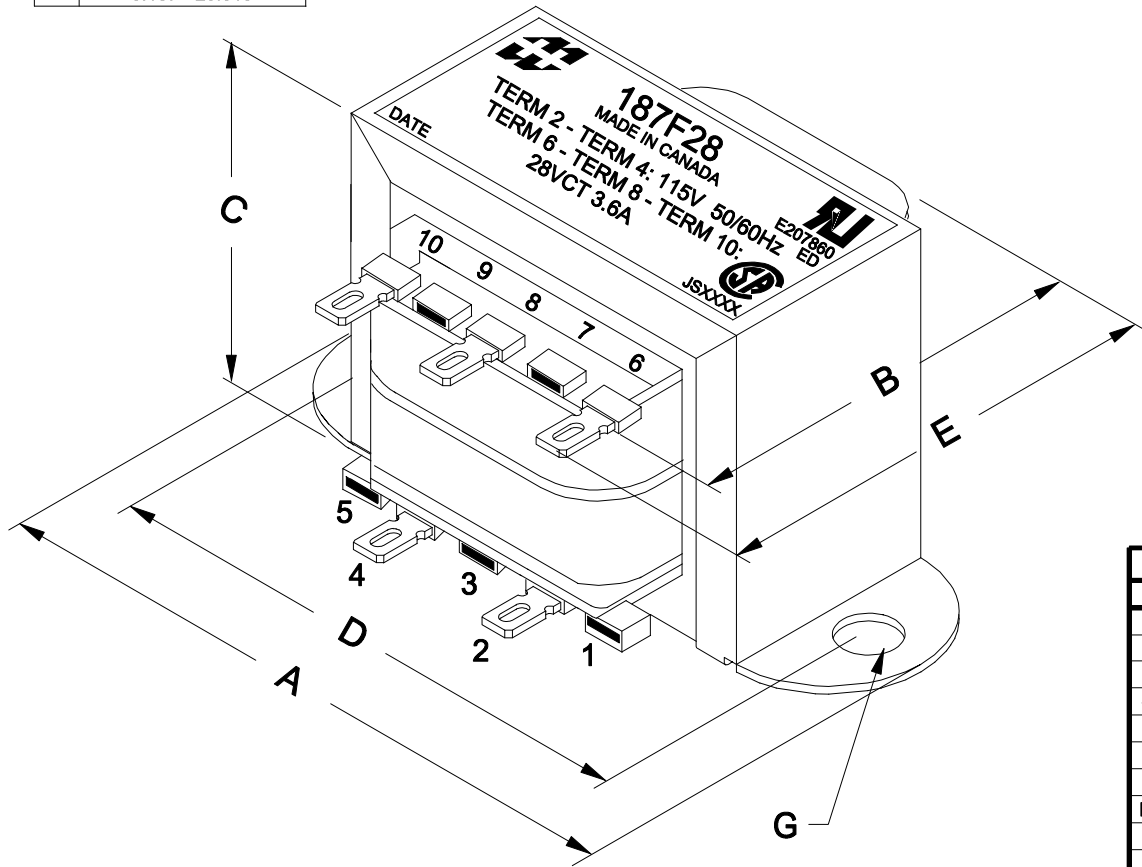

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 115V, 60Hz, TERM 2 - TERM 4	126mA Max.
Sec. N.L.V	@ 115V, 60Hz, TERM 2 - TERM 4	
	TERM 6 - TERM 10 =	30.70V ±2%
	TERM 6 - TERM 8 = TERM 8 - TERM 10 =	15.35V ±2%
DCR	@ 20°C, TERM 2 - TERM 4 =	4.209 Ω ±20%
	@ 20°C, TERM 6 - TERM 10 =	0.282 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION	DATE
0	RELEASED. C.I.	04/01/16

<b>HAMMOND MANUFACTURING™</b>	<b>ELECTRONIC DIVISION</b> 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540
	DWG. BY: C. ILIE DATE: 04/01/16	CHK'D BY: APP'D. BY: DIMENSIONS: IN(X) MM( )	TITLE: POWER TRANSFORMER