

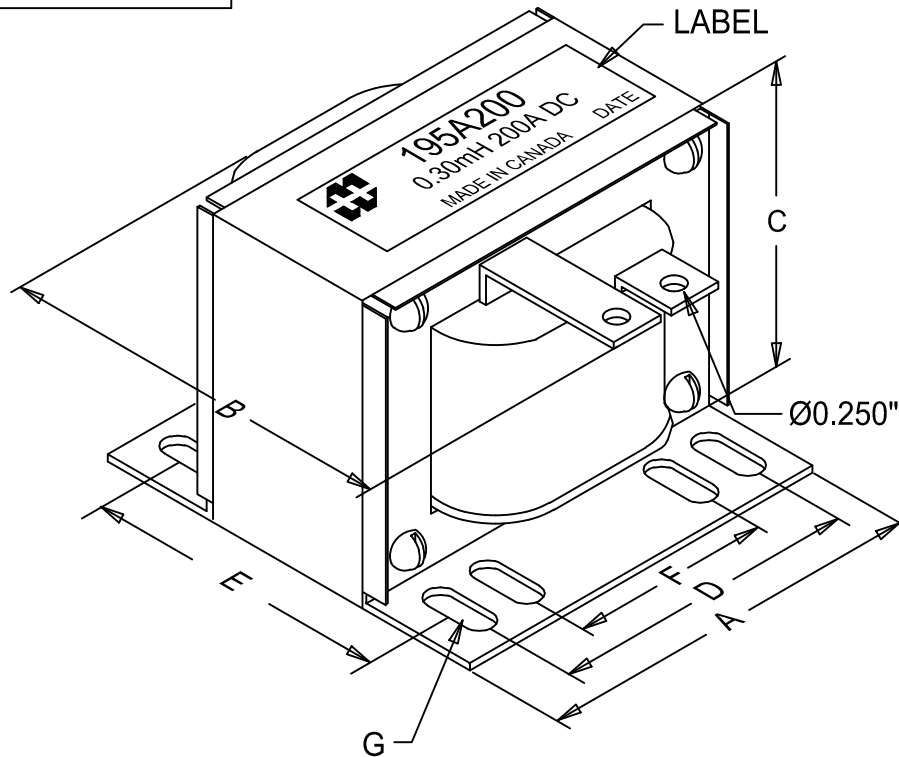


DIMENSIONS:

A	7.50" ±0.063
B	7.00" MAX.
C	6.50" ±0.063
D	6.00" ±0.063
E	5.25" ±0.063
F	4.50" ±0.063
G	0.281" X 0.563" ±0.015

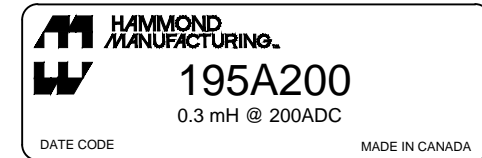

SCHEMATIC




ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 1V, 60Hz,	5.41 - 7.32A
Inductance	@ 200ADC =	0.3mH ± 15%
DCR	@ 20°C, LUG - LUG =	0.0012 Ω ±20%
	OPERATING VOLTAGE	750 VAC max.
	OPERATING VOLTAGE	600 VDC max.
	OPERATING TEMPERATURE	CLASS B 130°C
HIPOT	PRMARY - CORE	2500V, 60Hz, 1 SEC
WEIGHT		46 LBS.

PROPERTY AND COPYRIGHT NOTICE

THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.

REV.#	REVISION	DATE	 ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
0	RELEASED.	11/25/2013	PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. BACIK	CHK'D BY:	TITLE: HIGH CURRENT	DWG. NO.
			DATE: 11/25/2013	APP'D. BY:	INDUCTOR	195A200
			DIMENSIONS: IN(X) MM()			