

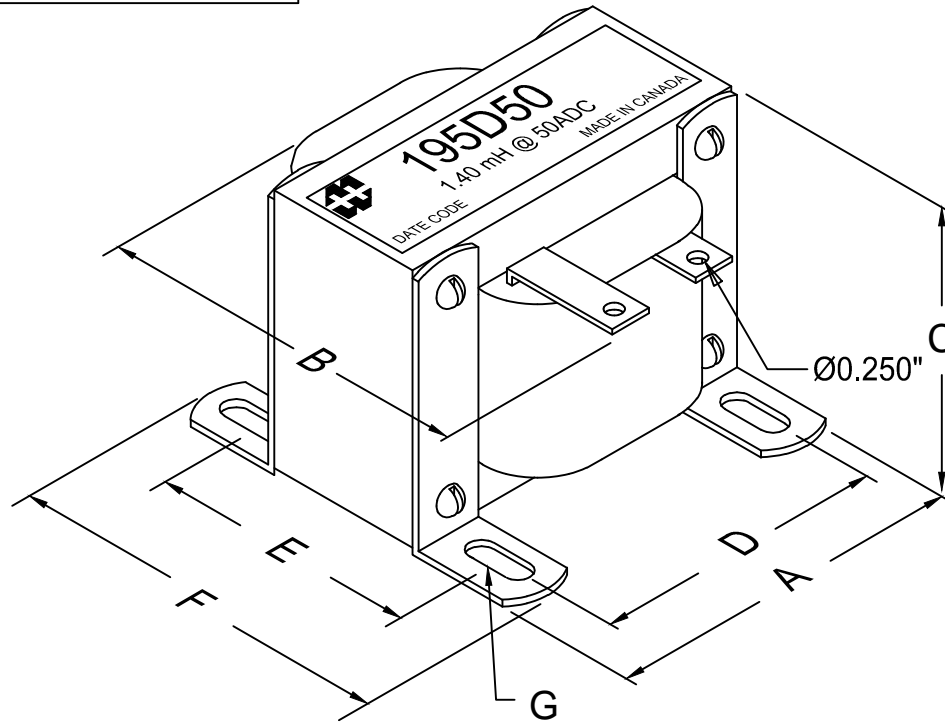


DIMENSIONS:

A	6.375" ±0.063
B	5.50" MAX.
C	5.375" ±0.063
D	5.25" ±0.063
E	3.875" ±0.063
F	5.00" ±0.063
G	0.281" X 0.563" ±0.015

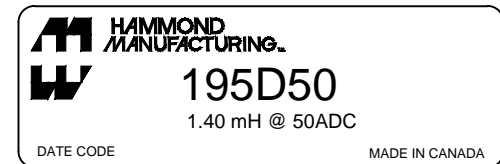

SCHEMATIC



ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 2V, 60Hz,	2.63 - 3.56A
Inductance	@ 50ADC =	1.40mH ± 15%
DCR	@ 20°C, LUG - LUG =	0.005 Ω ±20%
	OPERATING VOLTAGE	750 VAC max.
	OPERATING VOLTAGE	600 VDC max.
	OPERATING TEMPERATURE	CLASS B 130°C
HIPOT	PRMARY - CORE	2500V, 60Hz, 1 SEC
WEIGHT		28 LBS.

PROPERTY AND COPYRIGHT NOTICE

THIS DRAWING AND THE INFORMATION IT CONVEYS ARE THE PROPERTY OF HAMMOND MANUFACTURING. IT MAY NOT BE REPRODUCED, TRANSMITTED OR USED IN ANY MANNER WHATSOEVER WITHOUT THE WRITTEN PERMISSION OF HAMMOND MANUFACTURING.

REV.#	REVISION	DATE	ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
0	RELEASED.	11/25/2013	PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. BACIK	CHK'D BY:	TITLE: HIGH CURRENT	DWG. NO. 195D50
			DATE: 11/25/2013	APP'D. BY:	INDUCTOR	
				DIMENSIONS: IN(X) MM()		