
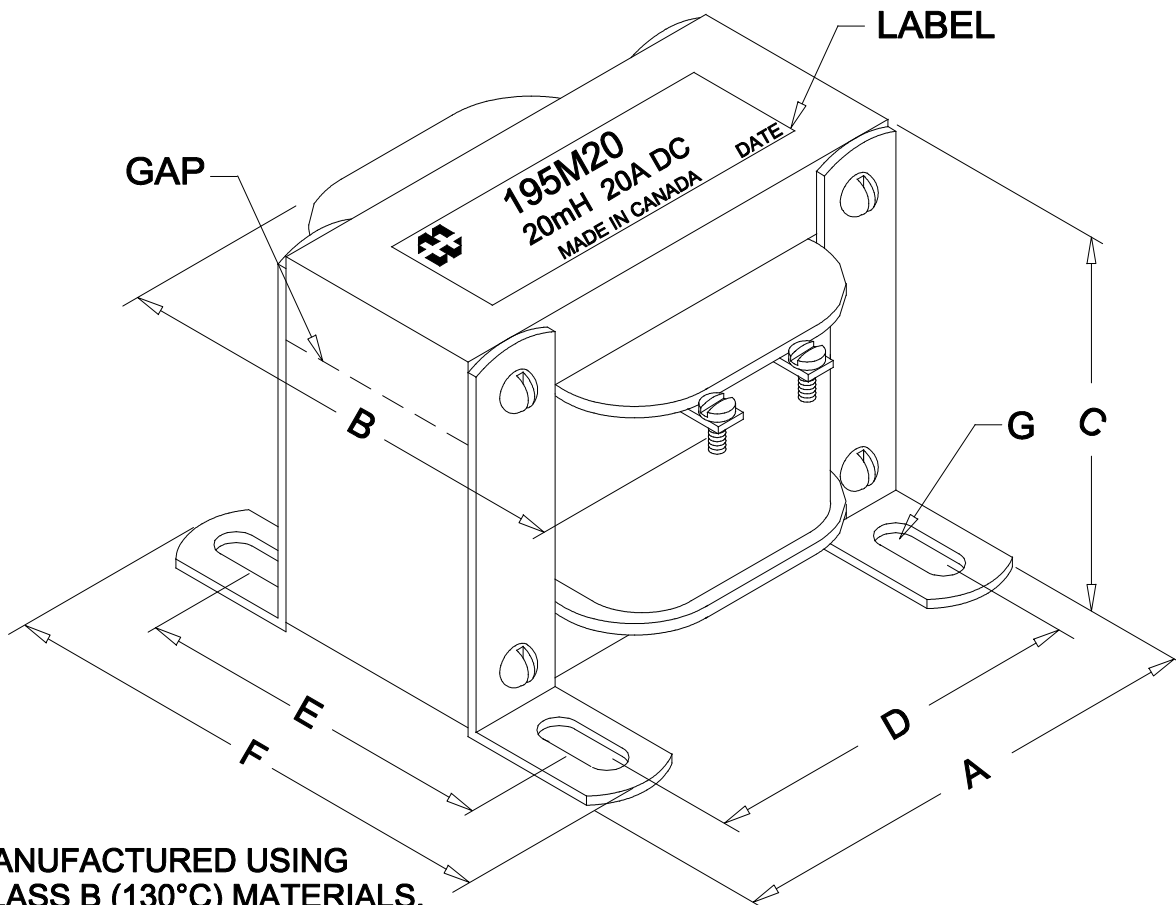


DIMENSIONS:	
A	5.250" $\pm 0.063$
B	6.875" $\pm 0.125$
C	4.438" $\pm 0.063$
D	4.375" $\pm 0.063$
E	5.531" $\pm 0.063$
F	6.656" $\pm 0.063$
G	0.281" X 0.563" 0.015

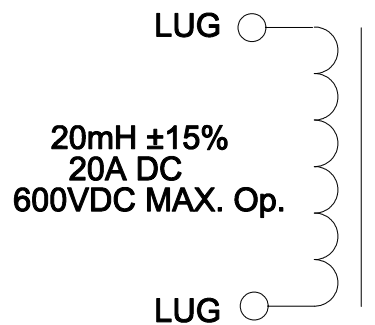

MANUFACTURED USING  
CLASS B (130°C) MATERIALS.  
RoHS COMPLIANT  
OPERATING TEMP.:  
-40°C TO 85°C  
STORAGE TEMP.:  
-40°C TO 105°C

#### ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
INDUCTANCE	@ 5V, 60Hz, 20A DC, LUG - LUG	20mH	$\pm 15\%$
DCR	@ 20°C, LUG - LUG =	0.079 $\Omega$	$\pm 15\%$
HIPOT	PRIMARY - CORE	2500V, 60Hz, 1 SEC	



**ELECTRONIC DIVISION**  
52 RANKIN PLACE,  
WATERLOO, ONTARIO, N2J 3Z5  
PH # (519) 886-6181  
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	09/09/15	RELEASED. C.I.	C. ILIE
			DATE
			09/09/15
			DIM IN(X)MM( )

195M20