DIMENSIONS:	
A	5.250" ±0.063
B	7.210" ±0.125
C	4.438" ±0.063
D	4.375" ±0.063
E	5.536" ±0.063
F	6.656" ±0.063
G	0.281" X 0.563" ±0.015

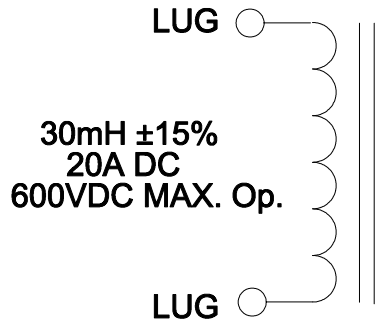

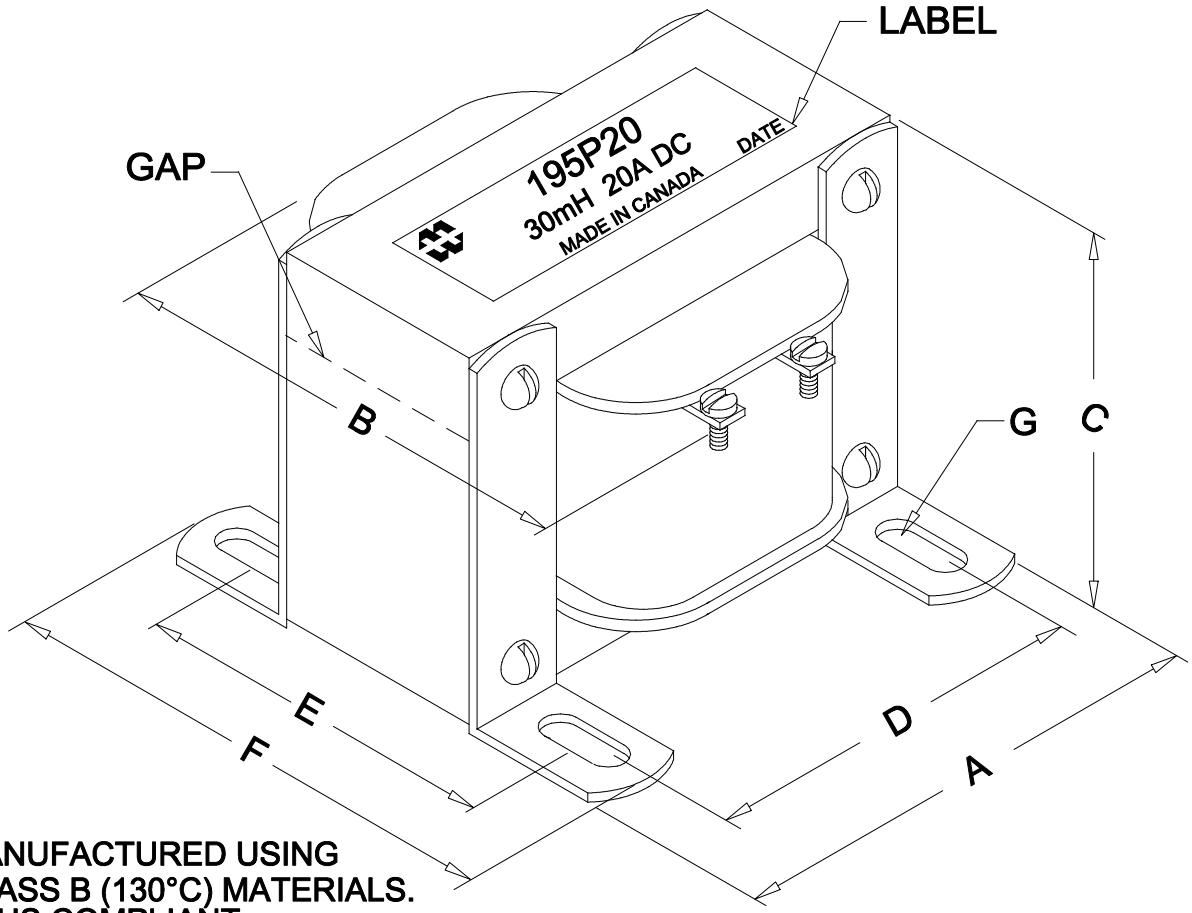

MANUFACTURED USING
CLASS B (130°C) MATERIALS.
RoHS COMPLIANT
OPERATING TEMP.:
-40°C TO 105°C
STORAGE TEMP.:
-40°C TO 85°C

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 5V, 60Hz, 20A DC, LUG - LUG	30mH ±15%
DCR	@ 20°C, LUG - LUG =	0.123 Ω ±15%
HIPOT	PRIMARY - CORE	2500V, 60Hz, 1 SEC

HAMMOND MANUFACTURING T.M.
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE: CHOKE

NO	DATE	REVISION	
0	09/28/20	RELEASED.	C.I.

DWG. BY: C. ILIE
DATE: 09/28/20
DIM IN(X)MM( )

195P20