



DIMENSIONS:	
A	3.250" ±0.063
B	2.000" ±0.125
C	1.995" ±0.063
D	2.813" ±0.063
E	1.076" ±0.063
F	2.326" ±0.015
G	0.187" ±0.015

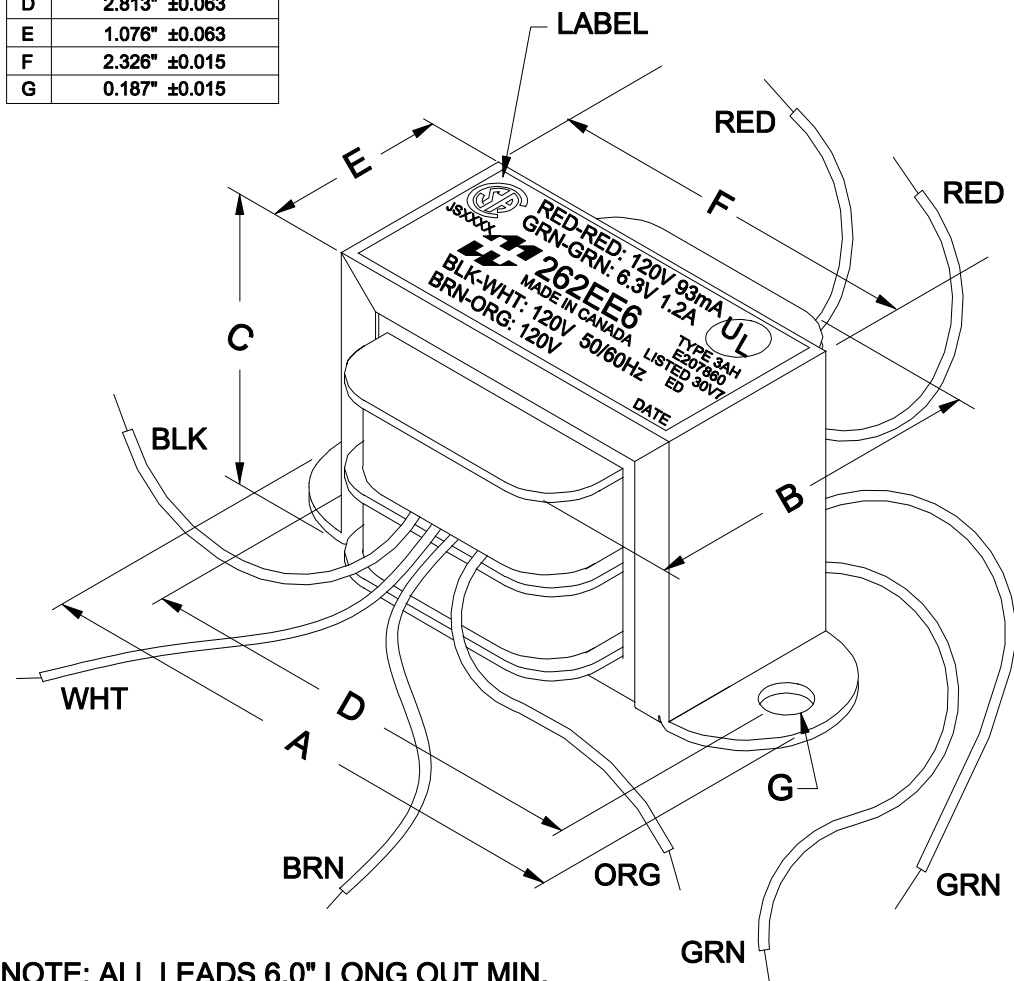

NOTE: ALL LEADS 6.0" LONG OUT MIN.

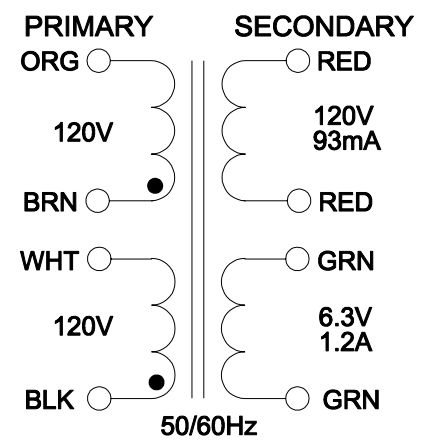

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 120V, 60Hz, BLK - WHT	40mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - WHT	
	BRN - ORG =	120.0V ±2%
	RED - RED =	133.7V ±2%
	GRN - GRN =	7.000V ±2%
DCR	@ 20°C, BLK - WHT =	61.40 Ω ±20%
	@ 20°C, BRN - ORG =	71.19 Ω ±20%
	@ 20°C, RED - RED =	69.18 Ω ±20%
	@ 20°C, GRN - GRN =	0.267 Ω ±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™		ELECTRONIC DIVISION	
0	RELEASED.	C.I. 05/11/21	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540	
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 262EE6
			DATE: 05/11/21	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		