
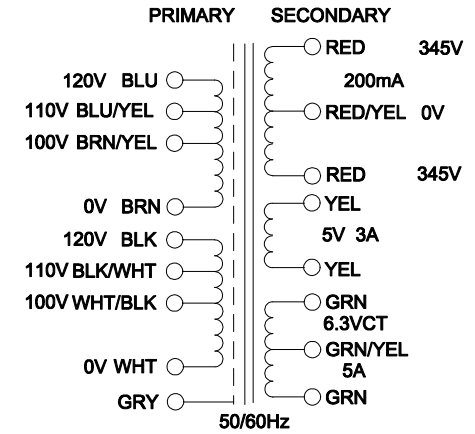


DIMENSIONS:

A	3.438" ±0.063
B	3.875" ±0.125
C	4.125" ±0.063
D	1.560" ±0.063
E	2.750" ±0.063
F	3.438" ±0.063
G	0.750" ±0.125

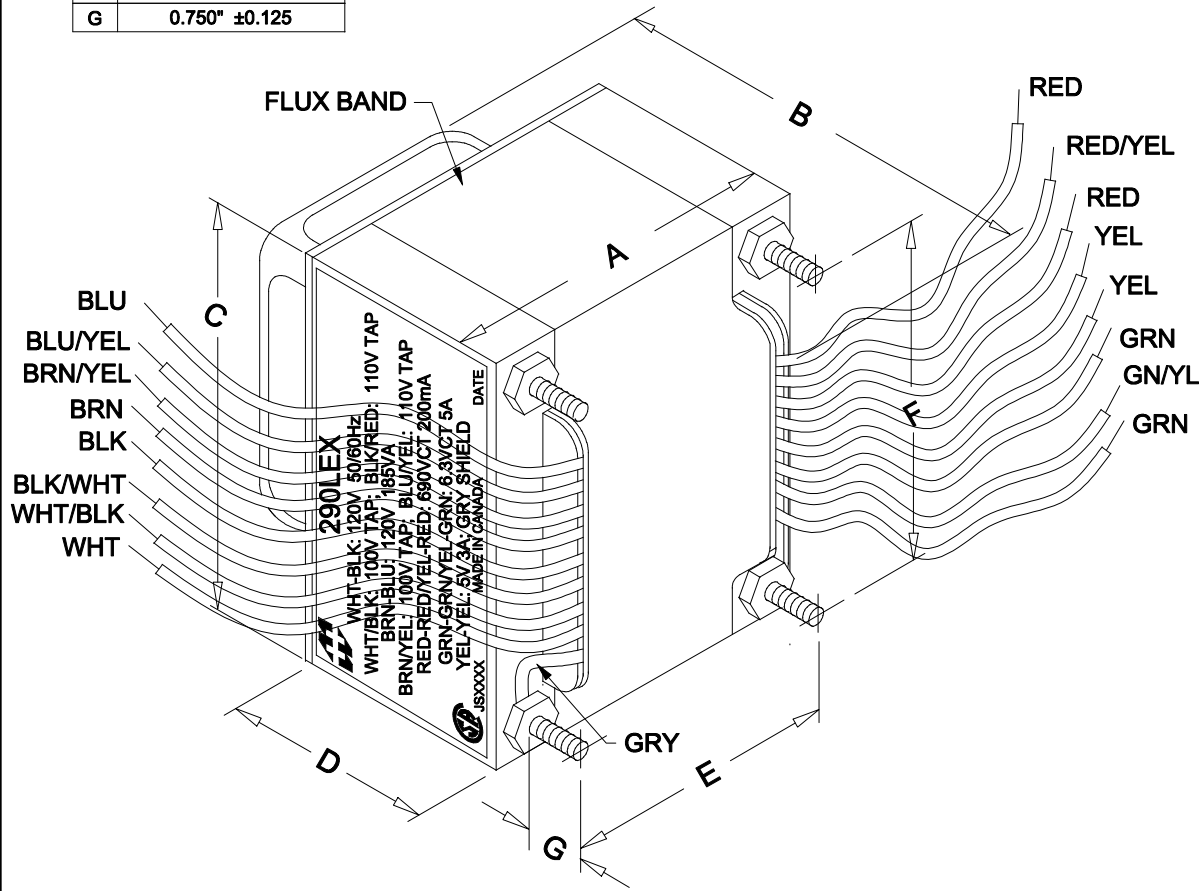

290LEX
 WHT-BLK: 120V 50/60Hz
 WHT/BLK: 100V TAP: BLK/RED: 110V TAP
 BRN-BLU: 120V 185VA
 BRN/YEL: 100V TAP: BLU/YEL: 110V TAP
 RED-RED/YEL-RED: 690VCT 200mA
 GRN-GRN/YEL-GRN: 6.3VCT 5A
 YEL-YEL: 5V 3A/GRY SHIELD
 #SXXXXX
 MADE IN CANADA

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
lex	@ 120V, 60Hz, WHT - BLK	287mA	Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK		
	WHT - WHT/BLK = BRN - BRN/YEL =	99.93V	±2%
	WHT - BLK/WHT = BRN - BLU/YEL =	110.0V	±2%
	BRN - BLU =	120.0V	±2%
	RED - RED =	730.9V	±2%
	RED - RED/YEL = RED/YEL - RED =	365.4V	±2%
	YEL - YEL =	5.436V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.345V	±2%
	GRN - GRN =	6.690V	±2%
DCR	@ 20°C, WHT - BLK =	3.238 Ω	±20%
	@ 20°C, BRN - BLU =	3.529 Ω	±20%
	@ 20°C, RED - RED =	96.89 Ω	±20%
	@ 20°C, YEL - YEL =	0.048 Ω	±20%
	@ 20°C, GRN - GRN =	0.039 Ω	±20%
HIPOT	PRIMARY - SECONDARY	3000V, 60Hz, 1 SEC	

NOTE: ALL LEADS 12" MIN. OUT. STRIP 0.5"

REV.#	REVISION	DATE	<p>HAMMOND MANUFACTURING™ ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5 PH # (519) 886-6181 FAX # (519) 886-9540</p>
0	PRELIMINARY.	C.I. 04/25/18	
1	RELEASED.	C.I. 04/27/18	
2	ADDED TEST INFORMATION.	C.I. 01/28/20	
		DWG. BY: C. ILIE	CHK'D BY:
		DATE: 04/19/18	APP'D. BY:
		DIMENSIONS: IN(X) MM()	
			TITLE: POWER TRANSFORMER
			DWG. NO. 290LEX