
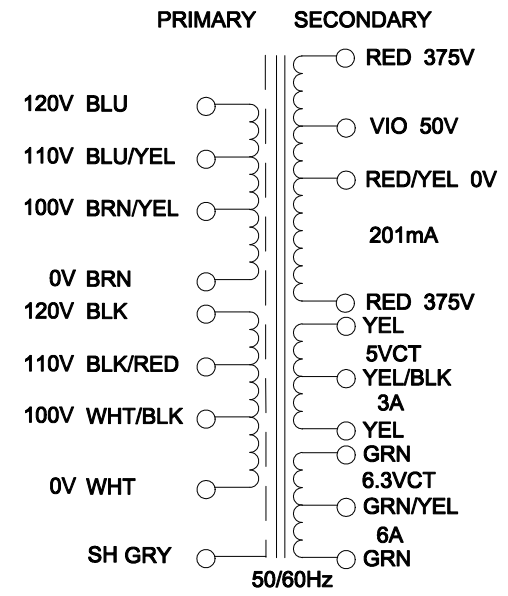


DIMENSIONS:	
A	4.250" ±0.063
B	5.000" ±0.063
C	4.500" ±0.063
D	3.375" ±0.063
E	4.250" ±0.063
F	1.500" ±0.063
G	1/4-20 x 0.500" DEEP INSERTS
H	0.500" ±0.015

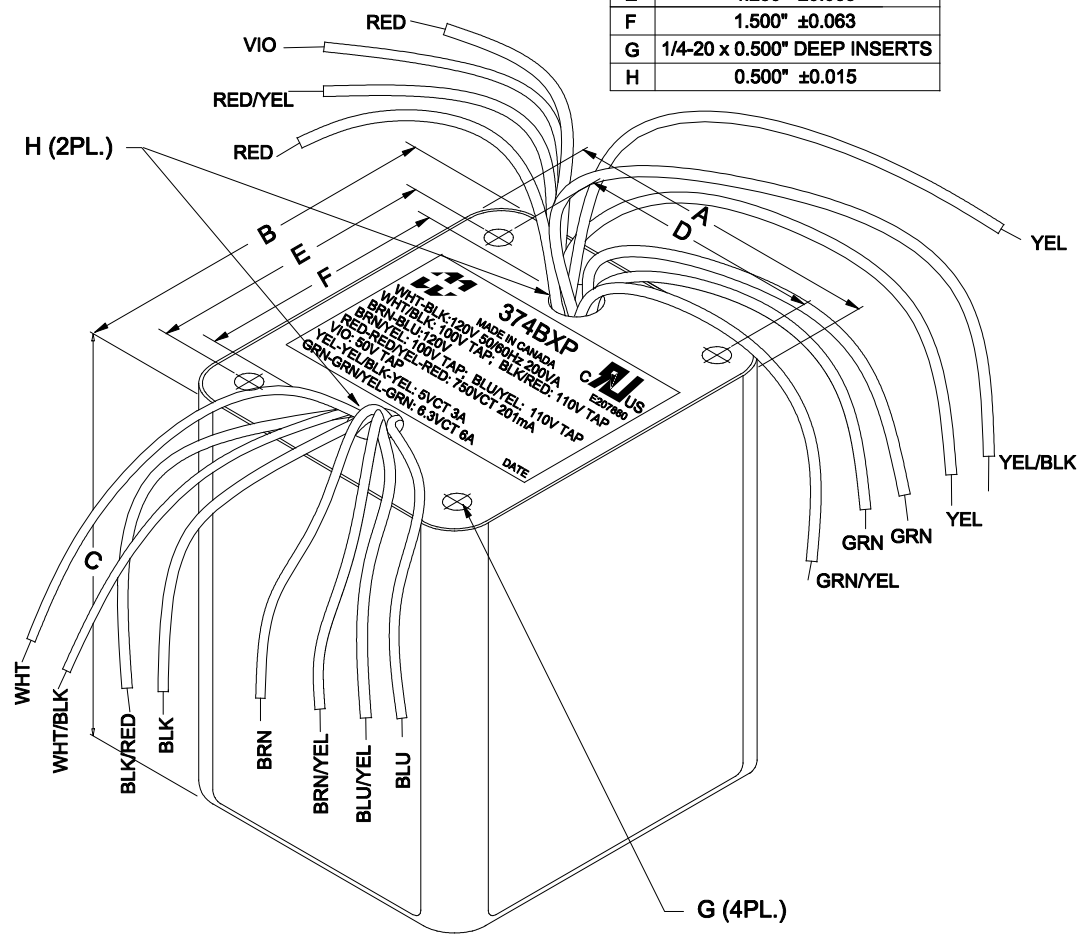

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 120V, 60Hz, WHT - BLK	160mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	RED - RED =	794.7V ±2%
	RED - RED/YEL = RED/YEL - RED =	397.3V ±2%
	RED/YEL - VIO =	53.34V ±2%
	YEL - YEL =	5.334V ±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.667V ±2%
	GRN - GRN =	6.857V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.429V ±2%
DCR	@ 20°C, WHT - BLK =	3.800 Ω ±20%
	@ 20°C, BRN - BLU =	4.200 Ω ±20%
	@ 20°C, RED - RED =	104.0 Ω ±20%
	@ 20°C, YEL - YEL =	0.060 Ω ±20%
	@ 20°C, GRN - GRN =	0.040 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .5"

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION	
0	RELEASED.	C.I. 07/13/20	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	
			PH # (519) 886-6181	FAX # (519) 886-9540
			DWG. BY: C. ILIE	CHK'D BY:
			DATE: 07/13/20	APP'D. BY:
			TITLE: PLATE & FILAMENT POTTED POWER TX.	
			DIMENSIONS: IN(X) MM()	
			DWG. NO. 374BXP	