
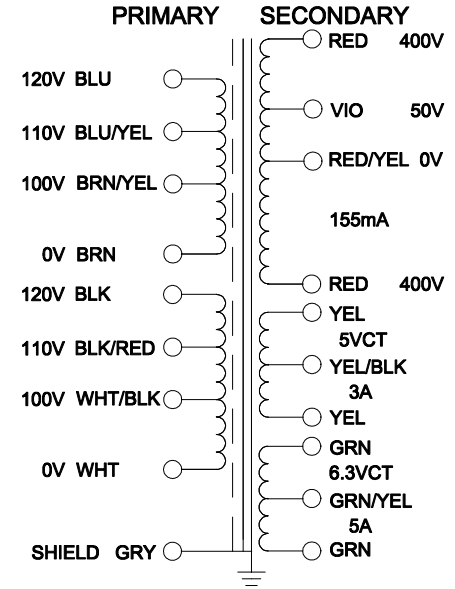


DIMENSIONS:	
A	4.250" ±0.063
B	5.000" ±0.063
C	4.500" ±0.063
D	3.375" ±0.063
E	4.250" ±0.063
F	1.500" ±0.063
G	1/4-20 x 0.500" DEEP INSERTS

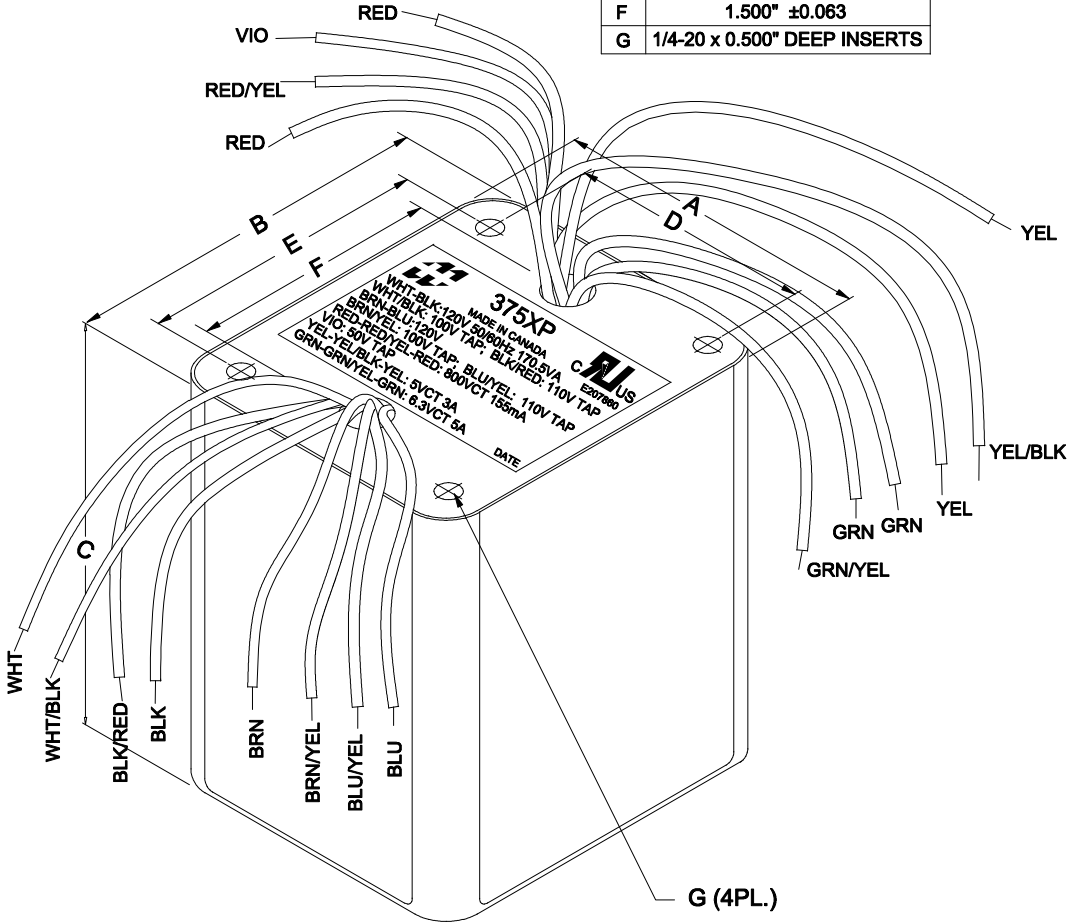

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
Iex	@ 120V, 60Hz, WHT - BLK	336mA Max.
Sec. N.L.V	@ 120V, 60Hz, WHT - BLK	
	RED - RED =	855.1V ±2%
	RED - RED/YEL = RED/YEL - RED =	427.6V ±2%
	RED/YEL - VIO =	50.08V ±2%
	YEL - YEL =	5.669V ±2%
	YEL - YEL/BLK = YEL/BLK - YEL =	2.835V ±2%
	GRN - GRN =	6.614V ±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.307V ±2%
DCR	@ 20°C, WHT - BLK =	3.124 Ω ±20%
	@ 20°C, BRN - BLU =	3.382 Ω ±20%
	@ 20°C, RED - RED =	135.1 Ω ±20%
	@ 20°C, YEL - YEL =	0.075 Ω ±20%
	@ 20°C, GRN - GRN =	0.028 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

NOTE: ALL LEADS 8" OUT MIN., STRIPPED .5"

REV.#	REVISION	DATE
0	RELEASED.	C.I. 06/27/16

**HAMMOND MANUFACTURING™** ELECTRONIC DIVISION  
 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5  
 PH # (519) 886-6181 FAX # (519) 886-9540

DWG. BY: C. ILIE	CHK'D BY:	TITLE: PLATE & FILAMENT POTTED POWER TX.	DWG. NO. 375XP
DATE: 06/27/16	APP'D. BY:	DIMENSIONS: IN(X) MM( )	