
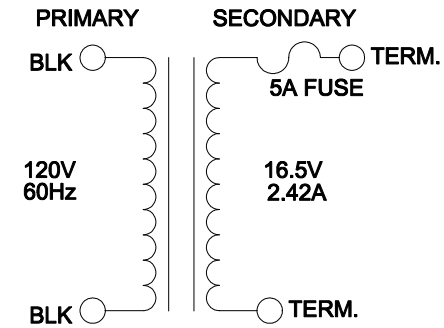


DIMENSIONS:	
A	2.33" ±0.063
B	2.60" ±0.125
C	1.98" ±0.063

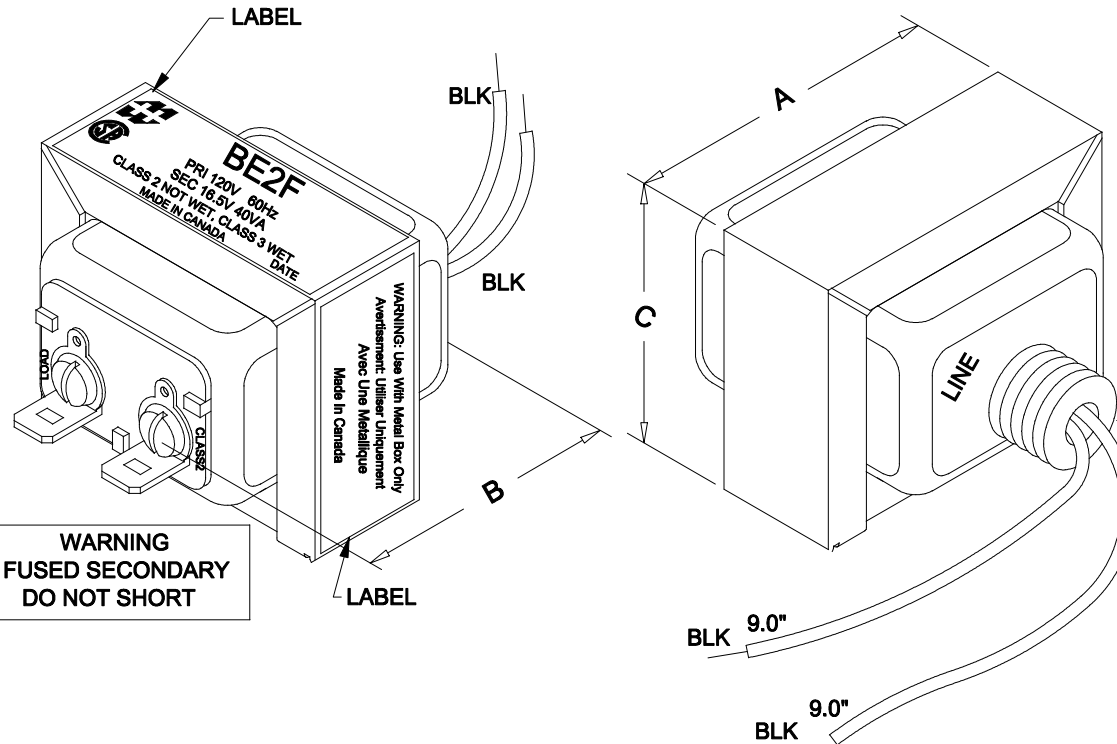

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
lex	@ 120V, 60Hz, BLK - BLK	110mA Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK	
	TER - TER =	19.70V ±2%
DCR	@ 20°C, BLK - BLK =	27.90 Ω ±20%
	@ 20°C, TER - TER =	0.466 Ω ±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION		52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5	PH # (519) 886-6181 FAX # (519) 886-9540
0	RELEASED.	05/05/15	MANUFACTURING™			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: CLASS 2 ENERGY LIMITING TX.	DWG. NO. BE2F
			DATE: 05/05/15	APP'D. BY: DIMENSIONS: IN(X) MM()		