

# PTC FAN HEATER




- > Compact fan heater
- > Heating power adjusts to ambient temperature

- > Integrated adjustable thermostat
- > Built-in overheat protection
- > DIN rail mountable

The semiconductor CR 027 fan heater prevents the formation of condensation and ensures an even temperature in enclosures. The integrated thermostat is used to set the desired temperature while the high performance axial fan provides forced air circulation. The CR 027 is also available with a continuously running fan (when powered).




## TECHNICAL DATA

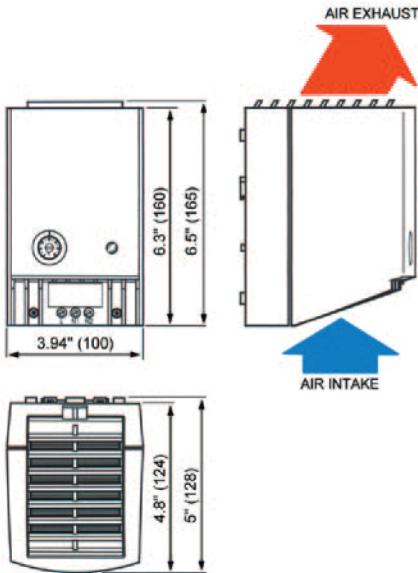


Heating element	PTC resistor - temperature limiting
Overheat protection	built-in temperature limiter
Axial fan, ball bearing	service life 50,000 h at 77 °F (25 °C)
Air flow, free blowing	see table below
Connection	2-pole terminal AWG 14 max. (2.5 mm <sup>2</sup> ), torque 0.8 Nm max.
Housing	plastic, UL 94V-0, light grey
Function control light	LED
Mounting	clip for 35 mm DIN rail, EN 60715
Mounting position	vertical
Operating / Storage temperature	-49 to +158 °F (-45 to +70 °C)
Operating / Storage humidity	max. 90 %RH (non-condensing)
Dimensions	6.5 x 3.94 x 5.0" (165 x 100 x 128 mm)
Protection class / Protection type	II (double insulated) / IP20
Approvals	UL File No. E204590, VDE, GOST TR

Heating Power / Ambient Temperature (@ 50 Hz)

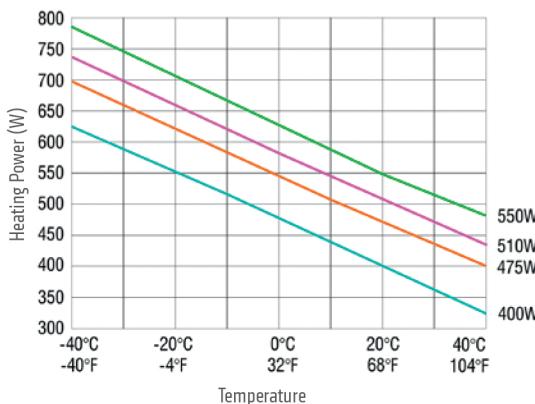

Heating Power / Ambient Temperature (@ 60 Hz)

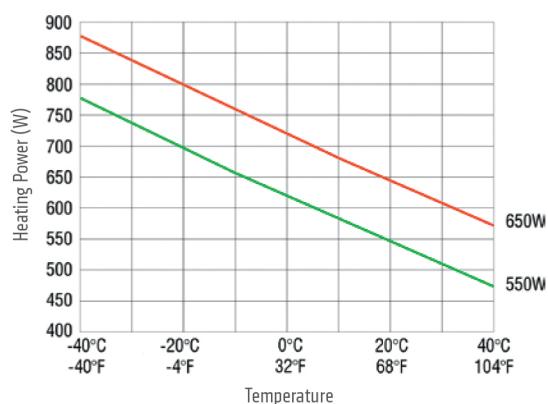

Heating capacity <sup>1</sup> (@ 50 Hz)	Heating capacity <sup>1</sup> (@ 60 Hz)	Operating voltage	Max. current (inrush)	Air flow, free blowing	Thermostat setting range <sup>2</sup>	Weight (approx.)
475 W	550 W	AC 220-240 V	11.0 A	20 cfm (35 m <sup>3</sup> /h)	0 to 60 °C	2.0 lbs (0.9 kg)
400 W	550 W	AC 100-120 V	14.0 A	20 cfm (35 m <sup>3</sup> /h)	32 to 140 °F	2.0 lbs (0.9 kg)
550 W	650 W	AC 220-240 V	13.0 A	26 cfm (45 m <sup>3</sup> /h)	0 to 60 °C	2.4 lbs (1.1 kg)
510 W	650 W	AC 100-120 V	15.0 A	26 cfm (45 m <sup>3</sup> /h)	32 to 140 °F	2.4 lbs (1.1 kg)

<sup>1</sup> at 68 °F (20 °C) ambient temperature; <sup>2</sup> Switch temperature difference 7K ( $\pm 4$ K tolerance)

Note: Only connect the L and N1 terminals - N2 is not used and grounding is not required.