

# 1414 N4 PHSS Series 316 Stainless Steel Enclosures - NEMA 4X

Continuous Hinge, Clamped Cover



**Inner  
Panel  
Included**



Corrosion Resistant Junction Boxes

## Application

- Designed for use as instrument enclosures, electric, hydraulic or pneumatic control housings, electrical junction boxes or terminal wiring enclosures.
- Provides protection where equipment may be hosed down or otherwise be very wet, or in specific applications where corrosion may be a problem.

## Standards

- UL 508 Type 3R, 4, 4X, 12 and 13.
- CSA Type 3R, 4, 4X, 12 and 13.
- **Complies with**
  - NEMA Type 3R, 4, 4X, 12 and 13.
  - JIC EGP-1-1967
  - IEC 60529, IP66

## Construction

- Formed from 14 gauge Type 316 stainless steel without knockouts, cutouts, or holes.
- Smooth, continuously welded seams.
- Welded brackets provide for enclosure mounting.
- Continuous stainless steel hinged cover is secured with stainless steel clamps.
- Oil resistant gaskets are permanently secured.
- All models include a removable 14 gauge inner panel.
- Tapped studs are provided for mounting inner panels.
- A bonding stud is provided on the door and a grounding stud is provided in the enclosure.

## Finish


- Cover and enclosure are natural stainless steel with a smooth brushed finish.
- Removable inner panel is finished white powder coating.

## Accessories

- Additional inner panels...see page **433**
- Breather kits...see page **423**
- Door clamping hardware...see page **427**
- Filter fans...see page **408-414**
- Heaters...see page **418-420**
- Louvered ventilating plates...see page **450**
- Terminal kit assemblies...see page **436**
- Thermostats...see page **421-422**
- Window kits...see page **444**

# 1414 N4 PHSS Series 316 Stainless Steel Enclosures - NEMA 4X

Continuous Hinge, Clamped Cover

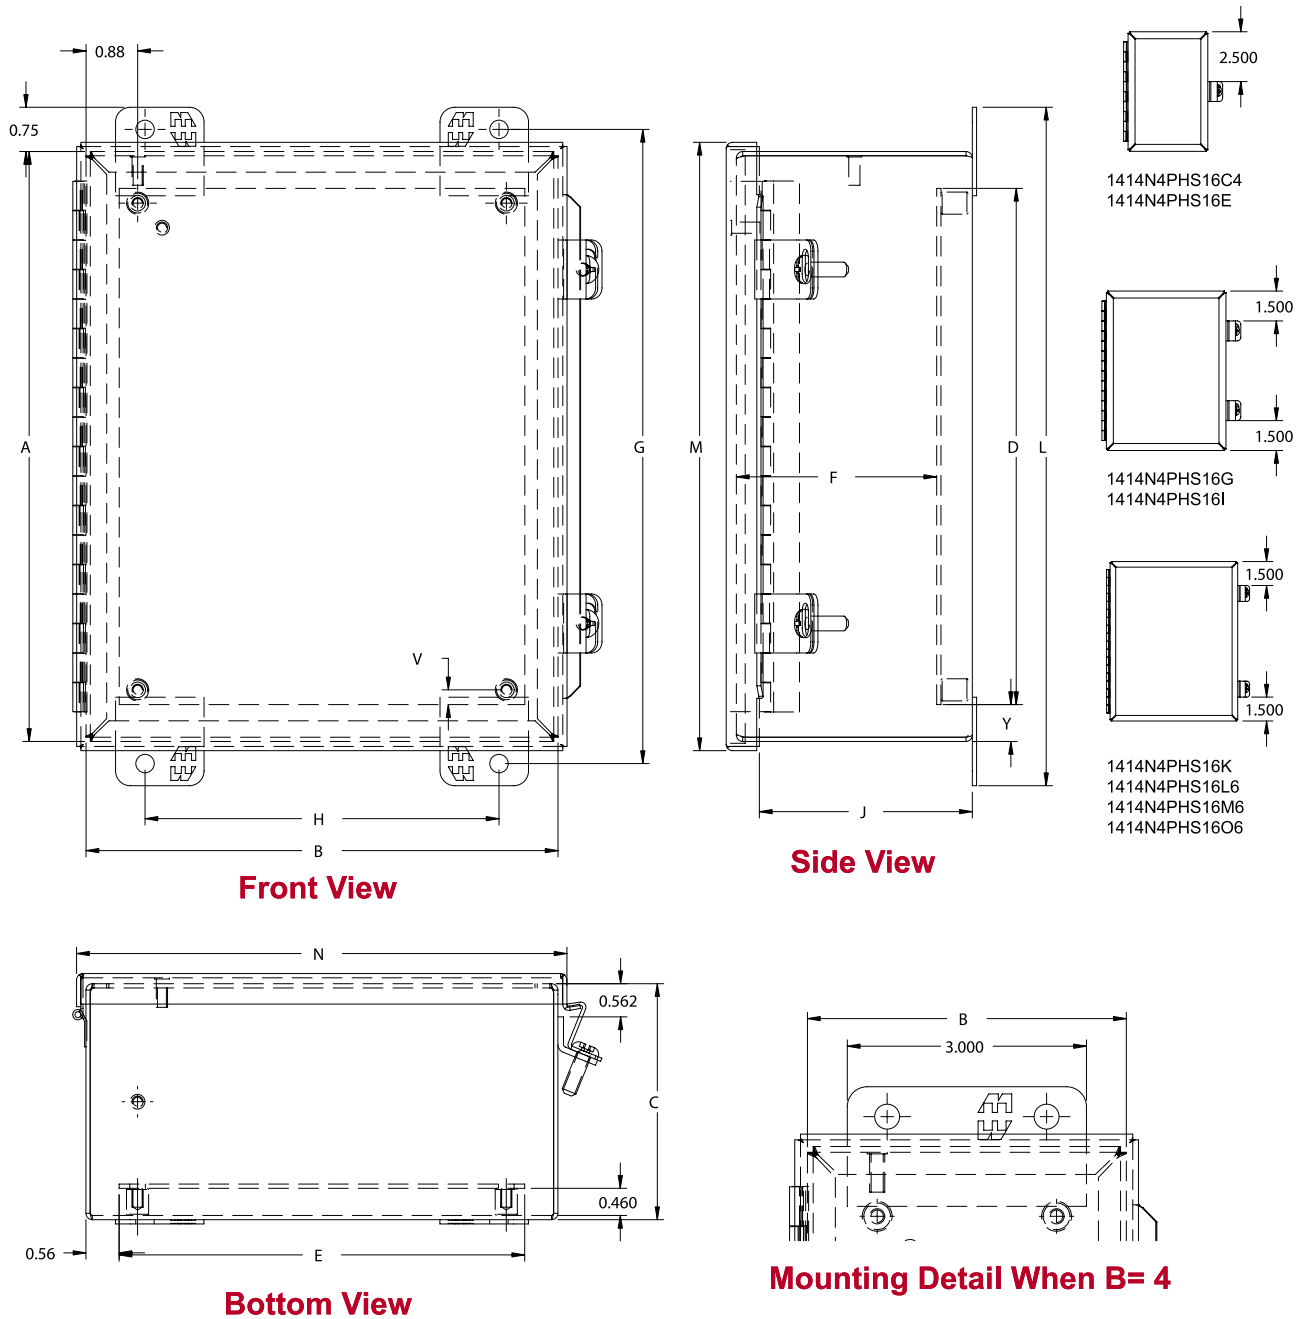

**Corrosion Resistant Junction Boxes**

Part Number	Dimensions			Panel Size			Mounting Centers			Cover Dimensions					Ship Wt. Lbs
	A	B	C	D	E	F	G	H	J	L	M	N	V	Y	
1414N4PHS16C4	6.00	4.00	4.00	4.88	2.88	3.50	6.75	2.00	3.60	7.50	6.31	4.31	0.31	0.56	5
1414N4PHS16E	6.00	6.00	4.00	4.88	4.88	3.50	6.75	4.00	3.60	7.50	6.31	6.31	0.31	0.56	6
1414N4PHS16G	8.00	6.00	3.50	6.75	4.88	3.00	8.75	4.00	3.60	9.50	8.31	6.31	0.25	0.63	6
1414N4PHS16I	10.00	8.00	4.00	8.75	6.88	3.50	10.75	6.00	3.60	11.50	10.31	8.31	0.25	0.63	10
1414N4PHS16K	12.00	10.00	5.00	10.75	8.88	4.50	12.75	8.00	4.60	13.50	12.31	10.31	0.25	0.63	15
1414N4PHS16L6	12.00	12.00	6.00	10.75	10.88	5.50	12.75	10.00	5.60	13.50	12.31	12.31	0.25	0.63	20
1414N4PHS16M6	14.00	12.00	6.00	12.75	10.88	5.50	14.75	10.00	5.60	15.50	14.31	12.31	0.25	0.63	21
1414N4PHS16O6	16.00	14.00	6.00	14.75	12.88	5.50	16.75	12.00	5.60	17.50	16.31	14.31	0.25	0.63	26

Technical references and DXF downloads available at [www.hamfmg.com](http://www.hamfmg.com)

All dimensions in inches unless specified otherwise

**Quality Enclosures. Service Excellence.**